

Studio Broadcast and Event

IP MediaLine Product Catalogue



draka

A Prysmian Brand

Prysmian - #1 cable maker in the world



ABOUT PRYSMIAN

Prysmian is a global cabling solutions provider leading the energy transition and digital transformation. By leveraging its wide geographical footprint and extensive product range, its track record of technological leadership and innovation, and a strong customer base, the company is well-placed to capitalise on its leading positions and win in new, growing markets. Prysmian's business strategy perfectly matches key market drivers by developing resilient, high-performing, sustainable and innovative cable solutions in the segments

of Transmission, Power Grid, Electrification and Digital Solutions. Prysmian is a public company listed on the Italian Stock Exchange, with almost 150 years of experience, about 30,000 employees, 108 plants and 26 R&D centres in over 50 countries, and sales of over €15 billion in 2023.

MULTIMEDIA SOLUTIONS

Society today demands the effective delivery of information at any time, anywhere. That's why Prysmian specialises in everything to do with cables for private communication networks. Supporting wholesalers, resellers and OEMs, our solutions are designed to meet both current and future demands, with absolute reliability and total flexibility.

Our Multimedia Solutions business area manufactures and sells optical, coaxial and copper cables.

From cables for TV and film studios, rail networks and underground long-distance communication to light signalling, track switching devices and mobile telecommunications, we innovate to create next-generation communication solutions, today.

Despite the extensive use of mobile phones today, the vast majority of applications are run on cabled infrastructures. Our Multimedia Solutions department develops, produces and sells copper and optical fibre cables that cover virtually every

communications application in this field. Whatever your needs, whether you depend on network solutions to run your business, or whether you are a wholesaler, value-added reseller, or OEM, we can help you meet your current and future requirements. We offer greater bandwidths, longer-life solutions, absolute reliability and more.



INDEX

VIDEO CABLE 75 Ω

| | |
|--|----|
| 0.41/1.9AF | 10 |
| 0.6/2.8AF | 11 |
| 0.65/2.8AF C _{ca} s1a d1 /Mini RG59 | 12 |
| 0.8/3.7AF | 13 |
| 1.0/4.8AF | 14 |
| RG6 C _{ca} s1a d1 | 15 |
| 1.4/5.6AF | 16 |
| 1.4/6.6AF | 17 |
| 1.6/7.3AF | 18 |
| RG11 C _{ca} s1a d1 | 19 |

UHD VIDEO CABLE 75 Ω

| | |
|------------------------|----|
| UHD 50 | 22 |
| UHD 100 | 23 |
| UHD 150 | 24 |
| 0.8L/3.7Dz Patch | 25 |
| 1.0L/4.8Dz Patch | 26 |
| 1.2L/4.8Dz Patch | 27 |
| HD Pro Sta 5e | 28 |
| HD Pro Sta 7e | 29 |

CAMERA CABLES

| | |
|---|----|
| SMPTE311M | 32 |
| SMPTE311M B2 _{ca} | 34 |
| SMPTE311M Hybrid High Flex Camera Cable | 35 |
| SMPTE 311M-HD-Hybrid-Camera Cable Outer diameter 15mm | 36 |
| Triaxial | 37 |
| Triax11 B2 _{ca} | 38 |
| Triflex | 39 |

AUDIO CABLES

| | |
|---|----|
| Microphone Cable Micro 22 | 42 |
| Microphone Cable Micro 22 FRNC | 43 |
| Microphone Cable XLR PRO FLEX FRNC | 44 |
| Microphone Cable XLR PRO FLEX | 45 |
| Multicore Audio Cable AC10 SP24/7 x pairs | 46 |
| Multicore Audio Cable AC10 SS24/7 x pairs | 47 |
| Multicore Audio Cable AC10 SS26/7 x pairs | 48 |
| Multicore Audio Cable AC10 SS23/1 x pairs | 49 |
| Speaker 1.5mm ² , Lif-YY 2 x 1.5 mm ² | 50 |
| Speaker 2.5mm ² , Lif-YY 2 x 2.5 mm ² | 51 |
| Speaker 1.5, Lif-HH nx1.5 mm ² FRNC-C | 52 |
| Speaker 2.5, Lif-HH nx2.5 mm ² FRNC-C | 53 |
| Speaker 4.0, Lif-HH nx4.0 mm ² FRNC-C | 54 |
| Speaker 6.0, Lif-HH nx6.0 mm ² FRNC-C | 55 |

COPPER DATA CABLES

| | |
|--|----|
| Media Install Indoor 10G MII S23 | 58 |
| Media Install Indoor 10G MII SS23 | 59 |
| Media Install Synchron MIS 23 | 60 |
| Media Flex Outdoor 10G MFO 26 | 61 |
| Media Flex Outdoor 10G MFO 23 | 62 |
| Media Flex Indoor 10G MFI 26 | 63 |
| Digital Control Cable 2 x 0.22mm ² B2 _{ca} | 64 |
| DMX + 3x2.5mm ² | 65 |
| DMX 234 AES/EBU (2x 0.34mm ²) FRNC | 66 |
| DMX 434 FRNC or PVC | 67 |

FIBER CABLES

| | |
|--|----|
| Central tube cable with 2-24 fibers based | 70 |
| Cable for mobile use with tight buffered fiber | 72 |

COAXIAL CABLE

Four main components

- Inner Conductor d
- Dielectric D
- Shield
- Outer Jacket

Characteristic Impedance (Z)


- 50Ω for RF
- 75Ω for Video and Community Antenna TV (CATV)

Foaming

- Chemical
- Physical

Skin Effect

- Current flows on the surface of the conductor at the high frequencies
- Reduces effective conductor area

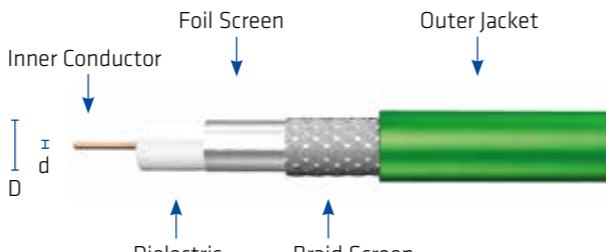

$$Z = \frac{60}{\sqrt{\epsilon_r}} \ln \frac{D}{d}$$

Z = Characteristic Impedance


ϵ_r = Relative permittivity of the dielectric

D = Inner Diameter of the outer conductor, mm

d = Diameter of the inner conductor, mm

SIGNAL TYPES

| Signal types | 720p | 1080p | 1080i | 4K (2160p) |
|-----------------------|---------------------|-----------------------|---------------------------|------------|
| HD-SDI | HD-SDI | FULL HD | UHD | |
| 1280x720 pixel | 1920x1080 pixel | 1920x1080 pixel | 3840x2160 pixel | |
| SMPTE 292M (1.5G-SDI) | SMPTE 424M (3G-SDI) | SMPTE 292M (1.5G-SDI) | SMPTE ST 2082-1 (12G-SDI) | |
| 20 dB/100 m max. | 20 dB/100 m max. | 20 dB/100 m max. | 40 dB/100 m max. | |

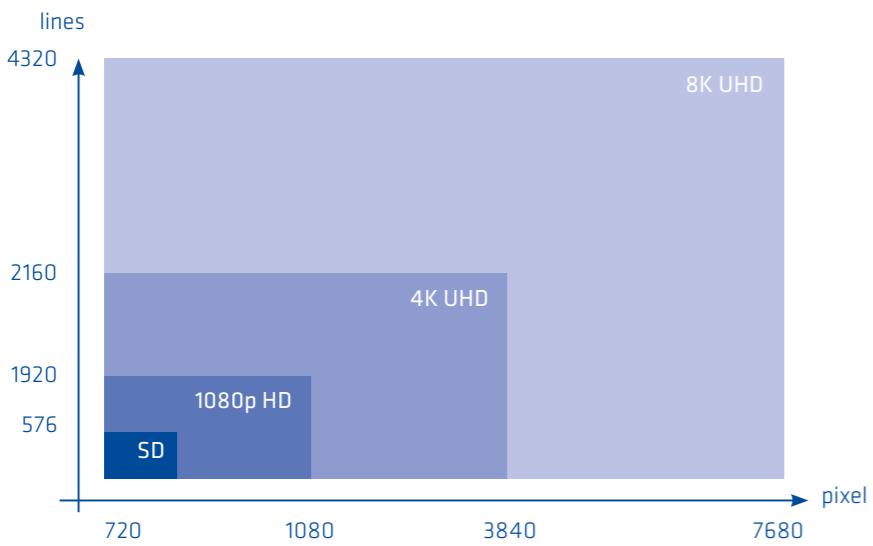

RESOLUTION 4K

3840 x 2160 progressive scan, the bit rate is 12Gb/s.

The high bandwidth of 12 Gb/s (4 times 3G /1080p) reduces the transmission length dramatically.

Three different 4K solutions for broadcast production are in discussion:

1. Single link (1x12Gb/s, 1/2 clock frequency = 6GHz)
2. Dual link (2x6Gb/s, 1/2 clock frequency = 3GHz)
3. Quad link (4x3Gb/s, 1/2 clock frequency = 1.5GHz)

The dual link and quad link solutions will solve the issue with the high bandwidth for new installation. To know the 4K situation of an existing broadcast infrastructure, we have to look at the single solution.



MATRIX TO DETERMINE MAX. TRANSMISSION LENGTH

| Draka Video Cables | SDI/SDV SMPTE 259M 270Mbit/s | 720p/1080i SMPTE 292M 1.5Gbit/s | 1080p SMPTE 424M 3Gbit/s | Quad Link SMPTE ST 2081 3Gbit/s | Dual Link SMPTE ST 2081 6Gbit/s | Single Link SMPTE ST 2081 12Gbit/s |
|----------------------------|------------------------------------|---------------------------------------|--------------------------------|---------------------------------------|---------------------------------------|--|
| Max. Attenuation | 30dB | 20dB | 20dB | 40dB | 40dB | 40dB |
| 0.41/1.9AF | 127 | 44 | 33 | 65 | 45 | 31 |
| 0.6/2.8AF | 227 | 66 | 47 | 94 | 65 | 45 |
| 0.65/2.8AF C _{ca} | 258 | 70 | 49 | 99 | 66 | 46 |
| 0.8/3.7AF | 315 | 89 | 63 | 125 | 87 | 60 |
| 0.8L/3.7Dz | 263 | 67 | 49 | 89* | 58* | 40* |
| 1.0/4.8AF | 386 | 109 | 75 | 151 | 104 | 70 |
| RG6 C _{ca} | 404 | 111 | 76 | 151 | 104 | 70 |
| 1.0L/4.8Dz | 285 | 80 | 51 | 92* | 61* | 43* |
| 1.2L/4.8Dz | 323 | 94 | 63 | 113* | 74* | 50* |
| 1.4/5.8AF UHD | 566 | 154 | 103 | 205 | 140 | 95 |
| 1.4/6.6AF | 566 | 154 | 105 | 211 | 144 | 96 |
| RG11 C _{ca} | 654 | 171 | 119 | 237 | 149 | 97 |
| 1.6/7.3AF | 662 | 175 | 118 | 236 | 152 | 107 |
| HD PRO 0.6/2.8 AF | 258 | 70 | 51 | 99 | 66 | 46 |
| HD PRO 0.8/3.7 AF | 327 | 90 | 64 | 127 | 86 | 56 |
| HD PRO 1.0/4.8 AF | 424 | 115 | 80 | 160 | 107 | 71 |
| UHD 50 | 258 | 74 | 50 | 102 | 72 | 49 |
| UHD 100 | 487 | 127 | 91 | 182 | 129 | 87 |
| UHD 150 | 744 | 210 | 144 | 288 | 197 | 141 |
| 1.2/5.0 UHD Flex | 438 | 116 | 80 | 144* | 98* | 62* |

*Patch/Flex cables with head room

The maximum transmission distances are based on the maximum loss at half frequency mentioned in the corresponding specification. Today's devices use equalizers mainly designed for 20dB loss (see SMPTE 292M and SMPTE 424M). For the technical realization it is essential to check the equipment e.g. equalizers if they are suitable for the maximum values

INDEX VIDEO CABLE 75 Ω

| | |
|--|----|
| 0.41/1.9AF | 10 |
| 0.6/2.8AF | 11 |
| 0.65/2.8AF C _{ca} s1a d1 /Mini RG59 | 12 |
| 0.8/3.7AF | 13 |
| 1.0/4.8AF | 14 |
| RG6 C _{ca} s1a d1 | 15 |
| 1.4/5.6AF | 16 |
| 1.4/6.6AF | 17 |
| 1.6/7.3AF | 18 |
| RG11 C _{ca} s1a d1 | 19 |

1. VIDEO CABLES 75 Ω

In the Broadcast industry, the following cable constructions are used to transmit video content:

- Installation cables: coaxial 75 Ω, foam PE dielectric, foil and braid
- Patch cables: coaxial 75 Ω, foam PE dielectric, two braids

Standard Installation video cables portfolio:

- 041/1.9AF
- 0.6/2.8AF
- 0.65/2.8AF C_{ca} s1a d1 /Mini RG59
- 0.8/3.7AF
- 1.0/4.8AF
- RG6 C_{ca} s1a d1 (1.0/4.8AF)
- 1.4/6.6AF
- 1.6/7.3AF
- RG11 C_{ca} s1a d1 (1.6/7.3AF)
- UHD 50
- UHD 100

Video patch:

- 0.8L/3.7Dz
- 1.0/4.8Dz
- 1.2L/4.8Dz

Today's broadcasters' infrastructure is designed for 720p, 1080i or even 1080p video content. The important question for broadcasters is what will be the future content and will it affect my infrastructure.

For example, the typical infrastructure of an outside broadcast truck is the coaxial cable 0.6/2.8AF. For a stadium it is the coaxial 1.4/6.6AF or 1.6/7.3AF.

Video content 1.5G:

The HD-SDI signal is defined by SMPTE292M. This content is like the SDI signal an uncompressed component signal, serial transmitted via one coaxial cable. The resolution of 1080i is 1080 lines x 1920 pixel. The resolution of 720p is of course 720 lines x 1280 pixel and the bit rate is 1.485Gbit/s. Based on the SMPTE 292M specification a maximum transmission distance of an 0.6/2.8AF is 70m plus a headroom. Practical tests showed 90m.

Video content 3G:

The HD-SDI signal is defined by SMPTE424M. The resolution is 1080 lines x 1920 pixel, the scan is progressive; the bit rate is 3Gbit/s. Identical to SMPTE292M, the maximum transmission length is specified at maximum 20dB attenuation at half clock frequency. Based on these key points, the maximum transmission distance of a 0.6/2.8AF network is 47m plus headroom, practical test 80m.

Looking at the next generation of possible video contents we would like to look at 4K.



0.41/1.9AF Video Cable 75 Ω

D_{ca}
CPR

E_{ca}
CPR

| Standards | |
|--|--|
| For analogue and digital video signals (Composite, Component, SDI/SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|------------------|--|
| PVC | Class E _{ca} |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Construction | |
|-----------------|--|
| Inner conductor | copper wire, bare, diameter 0.41 mm |
| Insulation | Foam-PE, diameter 1.9 mm |
| Outer conductor | Al-PET-Al foil + copper braid, tinned, diameter 2.5 mm |
| Sheath | FRNC or PVC, diameter 3.1 mm |
| Printing | DRAKA - 0.41/1.9 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|-------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 1.7 | 50 – 300 | ≥ 26 |
| 5 | 3.5 | 300 – 3000 | ≥ 22 |
| 10 | 4.9 | 3000 – 3500 | ≥ 18 |
| 100 | 20.4 | 3500 – 6000 | ≥ 15 |
| 200 | 26.4 | 6000 – 12000 | ≥ 15 |
| 750 | 45.2 | | |
| 1000 | 49.5 | | |
| 1500 | 61.5 | | |
| 3000 | 88.1 | | |
| 6000 | 127.7 | | |
| 9000 | 156.0 | | |
| 12000 | 199.5 | | |

| Product Code Table | | |
|----------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 0.41/1.9AF FRNC-C green | 60013645 | 60013863 |
| DR 0.41/1.9AF PVC green | 60014855 | 60014855 |

0.6/2.8AF Video Cable 75 Ω

D_{ca}
CPR

E_{ca}
CPR

| Standards | |
|--|--|
| For analogue and digital video signals (Composite, Component, SDI/SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|------------------|--|
| PVC | Class E _{ca} |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 0.6 mm |
| Insulation | Foam-PE, diameter 2.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 3.4 mm |
| Sheath | FRNC or PVC, diameter 4.5 mm, green RAL 6018 |
| Printing | DRAKA - 0.6/2.8 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|-------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 2.7 | 50 – 300 | ≥ 26 |
| 5 | 4.1 | 300 – 3000 | ≥ 22 |
| 10 | 5.1 | 3000 – 3500 | ≥ 18 |
| 100 | 11.4 | 3500 – 6000 | ≥ 15 |
| 200 | 15.7 | 6000 – 12000 | ≥ 15 |
| 750 | 30.2 | | |
| 1000 | 34.0 | | |
| 1500 | 42.4 | | |
| 3000 | 61.3 | | |
| 6000 | 89.4 | | |
| 9000 | 109.5 | | |
| 12000 | 126.4 | | |

| Product Code Table | | |
|-------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 0.6/2.8AF FRNC-C blue | 60011530 | 60012395 |
| DR 0.6/2.8AF FRNC-C black | 60011532 | 60012396 |
| DR 0.6/2.8AF FRNC-C green | 60011531 | 60014392 |
| DR 0.6/2.8AF FRNC-C violet | 60011529 | 60014398 |
| DR 0.6/2.8AF FRNC-C yellow | 60014401 | 60014401 |
| DR 0.6/2.8AF FRNC-C turquoise | 60014440 | 60014443 |
| DR 0.6/2.8AF PVC green | 60013995 | 60013997 |
| DR 0.6/2.8AF PVC violet | 60013998 | 60013998 |
| DR 0.6/2.8AF PVC red | 60014001 | 60014001 |

0.65/2.8AF C_{ca} s1a d1 /Mini RG59 Video Cable 75 Ω

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|----------------------------|--|
| LSHF-FR (FRNC-C) jacket | IEC60332-3-24, IEC60332-1, IEC 60754-1, IEC 61034-1, IEC 60754-2, Class C _{ca} s1d1a1 |

| Construction | |
|-----------------|--|
| Inner conductor | solid copper wire, bare, diameter 0.65 mm |
| Insulation | Foam-PE, diameter 2.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid diameter 3.4 mm + Al-PET foil longitudinal, bonded to the sheath |
| Sheath | FRNC, diameter 4.5 mm, green RAL 6018 |
| Printing | DRAKA - 0.6/2.8 AF S - 75 Ω ± 1% + SMPTE 259M, SMPTE 292M, SMPTE 424M, 4K, 8K, <ww/yy> <batch number> <CE_Mark> Cca s1a d1 <meter> m |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|-------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 1.2 | 50 - 300 | ≥ 26 |
| 5 | 2.5 | 300 - 3000 | ≥ 22 |
| 10 | 3.5 | 3000 - 3500 | ≥ 18 |
| 100 | 10.0 | 3500 - 6000 | ≥ 15 |
| 200 | 14.1 | 6000 - 12000 | ≥ 15 |
| 750 | 27.7 | | |
| 1000 | 33.2 | | |
| 1500 | 39.6 | | |
| 3000 | 60.9 | | |
| 5000 | 78.9 | | |
| 6000 | 84.1 | | |
| 9000 | 105.4 | | |
| 12000 | 122.8 | | |

| Product Code Table | | |
|---------------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| 0.65/2.8 C _{ca} s1a d1 green | 60014501 | 60086647 |

0.8/3.7AF Video Cable 75 Ω

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|------------------|---|
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} s1 d1 a1 |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} s1 d1 a1 |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 0.8 mm |
| Insulation | Foam-PE, diameter 3.7 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 4.5 mm |
| Sheath | FRNC, FRNC-C or PVC, diameter 5.9 mm, green RAL 6018 |
| Printing | DRAKA - 0.8/3.7 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.9 | 50 - 300 | ≥ 26 |
| 5 | 1.9 | 300 - 3000 | ≥ 22 |
| 10 | 2.5 | 3000 - 3500 | ≥ 18 |
| 100 | 8.2 | 3500 - 6000 | ≥ 15 |
| 200 | 11.2 | 6000 - 12000 | ≥ 15 |
| 750 | 22.5 | | |
| 1000 | 25.5 | | |
| 1500 | 32.0 | | |
| 3000 | 45.9 | | |
| 6000 | 67.1 | | |
| 9000 | 82.2 | | |
| 12000 | 94.9 | | |

| Product Code Table | | |
|----------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 0.8/3.7AF FRNC-C blue | 60011524 | 60011524 |
| DR 0.8/3.7AF FRNC-C green | 60011526 | 60011525 |
| DR 0.8/3.7AF FRNC-C black | 60014456 | 60014459 |
| DR 0.8/3.7AF FRNC-C blue | 60011524 | 60014463 |
| DR 0.8/3.7AF FRNC-C violet | 60011523 | 60014467 |
| DR 0.8/3.7AF PVC blue | 60011501 | 60021890 |
| DR 0.8/3.7AF PVC yellow | -- | 60026072 |
| DR 0.8/3.7AF PVC orange | 60011500 | 60011500 |
| DR 0.8/3.7AF PVC green | 60011502 | 60013908 |
| DR 0.8/3.7AF PVC violet | 60009199 | 60013914 |
| DR 0.8/3.7AF PVC black | 60013915 | 60013918 |
| DR 0.8/3.7AF PVC red | 60013919 | 60013919 |

1.0/4.8AF Video Cable 75 Ω**D_{ca}
CPR****E_{ca}
CPR**

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|------------------|--|
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 1.0 mm |
| Insulation | Foam-PE, diameter 4.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 5.6 mm |
| Sheath | FRNC, PVC, PUR diameter 7.0 mm ,green RAL 6018; blue RAL 5015; white RAL 9010 |
| Printing | DRAKA - 1.0/4.8 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.8 | 50 - 300 | ≥ 26 |
| 5 | 1.3 | 300 - 3000 | ≥ 22 |
| 10 | 2.0 | 3000 - 3500 | ≥ 18 |
| 100 | 6.7 | 3500 - 6000 | ≥ 15 |
| 200 | 9.2 | 6000 - 12000 | ≥ 15 |
| 750 | 18.4 | | |
| 1500 | 26.5 | | |
| 3000 | 38.3 | | |
| 6000 | 56.8 | | |
| 9000 | 69.6 | | |
| 12000 | 80.3 | | |

| Product Code Table | | |
|----------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 1.0/4.8AF FRNC-C violet | 60009613 | 60011557 |
| DR 1.0/4.8AF FRNC-C blue | 60011558 | 60011558 |
| DR 1.0/4.8AF FRNC-C green | 60009601 | 60014473 |
| DR 1.0/4.8AF PVC green | 60015161 | 60015162 |
| DR 1.0/4.8AF PVC blue | 60015163 | 60015163 |
| DR 1.0/4.8AF PUR green | 60014197 | 60014199 |
| DR 1.0/4.8AF PUR blue | 60014201 | 60014201 |

RG6 C_{ca} s1a d1 Video Cable 75 Ω**C_{ca}
CPR**

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|----------------------------|--|
| LSHF-FR (FRNC-C) jacket | IEC60332-3-24, IEC60332-1, IEC 60754-1, IEC 61034-1, IEC 60754-2, Class C _{ca} s1d1a1 |

| Construction | |
|-----------------|--|
| Inner conductor | bare copper wire, diameter 1.02 mm |
| Insulation | gas injected foam PE, diameter 4.45 mm |
| Outer conductor | Al-PET foil, longitudinal, bonded to the insulation under tinned copper braid, + Al-PET foil longitudinal, bonded to the sheath, diameter 5.5 mm |
| Sheath | FRNC-C, diameter 7.0 mm ± 0.3 mm green RAL 6018, black RAL 9005 |
| Printing | DRAKA RG6 FRNC-C, SMPTE 259M, SMPTE 292M, SMPTE 424M, 4K, 8K, <ww/yy> <batch number> <CE_Mark> Cca s1a d1 <meter> m |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.8 | 50 - 300 | ≥ 26 |
| 5 | 1.3 | 300 - 3000 | ≥ 22 |
| 10 | 2.0 | 3000 - 3500 | ≥ 18 |
| 100 | 6.4 | 3500 - 6000 | ≥ 15 |
| 200 | 9.1 | 6000 - 12000 | ≥ 15 |
| 750 | 18.0 | | |
| 1500 | 26.5 | | |
| 3000 | 38.3 | | |
| 6000 | 56.8 | | |
| 9000 | 69.6 | | |
| 12000 | 80.3 | | |

| Product Code Table | | |
|----------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| RG6 C _{ca} s1a d1 green | 60077007 | 60077007 |
| RG6 C _{ca} s1a d1 black | 60077761 | 60077761 |

1.4/5.8AF Video Cable 75 Ω

D_{ca}
CPR

E_{ca}
CPR

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Flame resistance | |
|------------------|--|
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 1.4 mm |
| Insulation | Foam-PE, diameter 5.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 6.4 mm |
| Sheath | FRNC, PVC, PUR diameter 7.7 mm, green RAL 6018, blue RAL 5015 |
| Printing | DRAKA 1.4/5.8 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.5 | 50 - 300 | ≥ 26 |
| 5 | 1.0 | 300 - 3000 | ≥ 22 |
| 10 | 1.5 | 3000 - 3500 | ≥ 18 |
| 100 | 4.6 | 3500 - 6000 | ≥ 15 |
| 200 | 6.6 | 6000 - 12000 | ≥ 15 |
| 750 | 13.0 | | |
| 1500 | 19.5 | | |
| 3000 | 28.6 | | |
| 6000 | 42.3 | | |
| 9000 | 50.9 | | |
| 12000 | 58.8 | | |

| Product Code Table | | |
|----------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| 1.4/5.8 AF FRNC-C gn | 90151059 | |

1.4/6.6AF Video Cable 75 Ω

D_{ca}
CPR

E_{ca}
CPR

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 1.4 mm |
| Insulation | Foam-PE, diameter 6.4 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 7.2 mm |
| Sheath | FRNC, PVC, PUR diameter 9.2 mm, green RAL 6018, blue RAL 5015 |
| Printing | DRAKA - 1.4/6.6 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.5 | 50 - 300 | ≥ 26 |
| 5 | 1.0 | 300 - 3000 | ≥ 22 |
| 10 | 1.5 | 3000 - 3500 | ≥ 18 |
| 100 | 4.6 | 3500 - 6000 | ≥ 15 |
| 200 | 6.6 | 6000 - 12000 | ≥ 15 |
| 750 | 13.0 | | |
| 1500 | 19.0 | | |
| 3000 | 27.7 | | |
| 6000 | 41.6 | | |
| 9000 | 50.9 | | |
| 12000 | 58.8 | | |

| Product Code Table | | |
|--------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR1.4/6.6AF FRNC-C blue | 60011591 | 60011591 |
| DR1.4/6.6AF FRNC-C green | 60011592 | 60011592 |
| DR1.4/6.6AF PVC 75 green | 60015166 | 60015166 |
| DR1.4/6.6AF PUR blue | 60015167 | 60015167 |

1.6/7.3AF Video Cable 75 Ω**D_{ca}**
CPR**E_{ca}**
CPR

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|------------------|---|
| PVC | Not for fixed installation in construction works |
| FRNC | IEC 60332-1, IEC 60754, IEC 61034, Class E _{ca} s1 d1 a1 |
| FRNC-C | additionally IEC 60332-3 -24, Class D _{ca} s1 d1 a1 |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 1.6 mm |
| Insulation | Foam-PE, diameter 7.3 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 8.2 mm |
| Sheath | FRNC, diameter 10.3 mm, green RAL 6018 |
| Printing | DRAKA - 1.6/7.3 AF - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.4 | 50 - 300 | ≥ 26 |
| 5 | 0.9 | 300 - 3000 | ≥ 22 |
| 10 | 1.3 | 3000 - 3500 | ≥ 18 |
| 100 | 3.9 | 3500 - 6000 | ≥ 15 |
| 200 | 5.3 | 6000 - 12000 | ≥ 15 |
| 750 | 11.4 | | |
| 1500 | 16.9 | | |
| 3000 | 26.4 | | |
| 6000 | 37.3 | | |
| 9000 | 45.6 | | |
| 12000 | 52.6 | | |

| Product Code Table | | |
|---------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 1.6/7.3AF PVC green | 60015158 | 60015158 |
| DR 1.6/7.3AF PUR green | 60015160 | 60015160 |
| DR 1.6/7.3AF PUR blue | 60016762 | 60016762 |
| DR 1.6/7.3AF FRNC-C green | 60016763 | 60016765 |
| DR 1.6/7.3AF FRNC-C black | 60016768 | 60016769 |

RG11 C_{ca} s1a d1 Video Cable 75 Ω**C_{ca}**
CPR

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Flame resistance | |
|----------------------------|--|
| LSHF-FR (FRNC-C) jacket | IEC60332-3-24, IEC60332-1, IEC 60754-1, IEC 61034-1, IEC 60754-2, Class C _{ca} s1d1a1 |

| Construction | |
|-----------------|--|
| Inner conductor | bare copper wire, diameter 1.63 mm |
| Insulation | gas injected foam PE, diameter 7.15 mm |
| Outer conductor | Al-PET foil, longitudinal, bonded to the insulation under tinned copper braid, + Al-PET foil longitudinal, bonded to the sheath, diameter 8.1 mm |
| Sheath | FRNC-C, diameter 10.0 mm ± 0.3 mm green RAL 6018, black RAL 9005 |
| Printing | DRAKA - RG11 FRNC-C, SMPTE 259M, SMPTE 292M, SMPTE 424M, 4K, 8K, <ww/yy> <batch number> <CE_Mark> Cca s1a d1 <meter> m |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.4 | 50 - 300 | ≥ 26 |
| 5 | 0.9 | 300 - 3000 | ≥ 22 |
| 10 | 1.3 | 3000 - 3500 | ≥ 18 |
| 100 | 4.0 | 3500 - 6000 | ≥ 15 |
| 200 | 5.8 | 6000 - 12000 | ≥ 15 |
| 750 | 11.7 | | |
| 1500 | 16.9 | | |
| 3000 | 26.4 | | |
| 6000 | 41.3 | | |
| 9000 | 49.8 | | |
| 12000 | 56.3 | | |

| Product Code Table | | |
|------------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| RG11 C _{ca} s1a d1, green | | |



INDEX UHD VIDEO CABLE 75 Ω

| | |
|------------------------|----|
| UHD 50 | 22 |
| UHD 100 | 23 |
| UHD 150 | 24 |
| 0.8L/3.7Dz Patch | 25 |
| 1.0L/4.8Dz Patch | 26 |
| 1.2L/4.8Dz Patch | 27 |
| HD Pro Sta 5e | 28 |
| HD Pro Sta 7e | 29 |

2. UHD VIDEO CABLE 75 Ω

Draka coaxial cable for transmission of 4K signals
Coaxial cable goes 4K

There is currently a discussion on higher data rate on the market. 4K is playing an ever-increasing role in this. Currently, 4K transmissions in Quad Link (4 x 3 Gbit/s) are carried out for technical reasons. In practice, however, this proves to be uneconomical. Single-link transmission at 12 Gbit/s should be aimed for.

According to SMPTE ST 2082, the 4K format transmits video signals with a resolution of 3840 x 2160 pixels. Data transmission takes place with a rate of 12 Gbit/s. This corresponds to a half clock frequency of 6 GHz. The standard also provides for a maximum allowed attenuation of 40 dB. Draka has developed coaxial cables for 4K applications based on these specifications. For example, the new UHD series includes the UHD50 and UHD100.

In developing the new series, Draka has placed great emphasis on meeting the requirements of OB truck manufacturers, such as maintaining the outer cable diameters of 4.5 and 7 millimeters. Draka has achieved this through higher dielectric foaming and a silver-plated, size-optimized, inner conductor.

The quality of the components is of decisive importance in the technical implementation. To achieve maximum results, connectors and cables should be matched to each other. Tolerances must be kept as low as possible.

It should also be taken into account that different generations of equalizers are installed in the input board of the devices. These have a significant influence in determining the maximum achievable cable length.



UHD 50 Video Cable 75 Ω

E_{ca} CPR **UHD 4K** **1080p** **1080i** **HDTV**

| Standards | |
|---|--|
| Designed for 12Gbit/s, 4K (SMPTE 2082), UHD, also for Composite, Component, SDI, SDV, SDTI, HDTV (1080i, 720p, 1080p) | |

| Flame resistance | |
|------------------|--|
| FRNC: | IEC 60332-1; IEC 60754-2; IEC 61034, CPR Class E _{ca} |

| Construction | |
|-----------------|---|
| Inner conductor | Solid copper wire, silvered, diameter 0.7 mm |
| Insulation | Foam-PE, diameter 2.9 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid |
| Sheath | PVC or FRNC, green RAL 6018, diameter 4.5mm |
| Printing | DRAKA ULTRA HD PRO 50 UHD SMPTE 292M, SMPTE 424M, 4K, 8K, 12G |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|-------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 2.4 | 50 - 300 | ≥ 26 |
| 5 | 2.2 | 300 - 3000 | ≥ 22 |
| 10 | 3.1 | 3000 - 3500 | ≥ 18 |
| 100 | 10.0 | 3500 - 6000 | ≥ 15 |
| 200 | 13.9 | 6000 - 12000 | ≥ 15 |
| 750 | 26.8 | | |
| 1500 | 39.1 | | |
| 3000 | 55.6 | | |
| 6000 | 81.0 | | |
| 9000 | 99.2 | | |
| 12000 | 114.6 | | |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| UHD50 FRNC | 60055255 | 60055255 |

UHD 100 Video Cable 75 Ω

E_{ca} CPR **UHD 4K** **1080p** **1080i** **HDTV**

| Standards | |
|---|--|
| Designed for 12Gbit/s, 4K (SMPTE 2082), UHD, also for Composite, Component, SDI, SDV, SDTI, HDTV (1080i, 720p, 1080p) | |

| Flame resistance | |
|------------------|--|
| FRNC: | IEC 60332-1; IEC 60754-2; IEC 61034, CPR Class E _{ca} |

| Construction | |
|-----------------|--|
| Inner conductor | solid copper wire, silvered, diameter 1.2 mm |
| Insulation | Foam-PE, diameter 4.9 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 5.7 mm |
| Sheath | PVC or FRNC, green, RAL 6018, diameter 7.0 mm |
| Printing | DRAKA ULTRA HD PRO 100 UHD SMPTE 292M, SMPTE 424M, 4K, 8K, 12G |

| Electrical data at 20°C (nominal) | | | |
|-----------------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 1.8 | 50 - 300 | ≥ 26 |
| 5 | 1.1 | 300 - 3000 | ≥ 22 |
| 10 | 1.6 | 3000 - 3500 | ≥ 18 |
| 100 | 5.3 | 3500 - 6000 | ≥ 15 |
| 200 | 9.3 | 6000 - 12000 | ≥ 15 |
| 750 | 15.8 | | |
| 1500 | 22.0 | | |
| 3000 | 31.0 | | |
| 6000 | 44.7 | | |
| 9000 | 57.7 | | |
| 12000 | 63.2 | | |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| UHD100 FRNC | 60055256 | 60055256 |



E_{ca} CPR **UHD 4K** **1080p** **1080i** **HDTV**

| Standards | |
|---|--|
| Designed for 12Gbit/s, 4K (SMPTE 2082), UHD, also for Composite, Component, SDI, SDV, SDTI, HDTV (1080i, 720p, 1080p) | |

| Construction | |
|---------------------|---|
| Inner conductor | stranded copper wires, silvered, diameter 7x0.75 mm |
| Insulation | Foam-PE, diameter 9.7 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid |
| Sheath | PVC or FRNC, green RAL 6018, diameter 12.7 mm |
| Printing | DRAKA ULTRA HD PRO 150 UHD SMPTE 292M, SMPTE 424M, 4K, 8K |

| Electrical data at 20°C (nominal) | | | |
|--|------|-------------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 750 | 9.5 | 50 - 300 | ≥ 26 |
| 1500 | 13.9 | 300 - 3000 | ≥ 22 |
| 2250 | 17.5 | 3000 - 3500 | ≥ 18 |
| 3000 | 20.3 | 3500 - 6000 | ≥ 15 |
| 6000 | 28.2 | | |
| 9000 | 34.5 | | |
| 10000 | 36.3 | | |
| 12000 | 39.8 | | |

| Product Code Table | | |
|----------------------------|--------------------------|-----------------------|
| Product Description | PG Reference Code | PG Part Number |
| ULTRA HD PRO 150 UHD FRNC | | 60081959 |
| ULTRA HD PRO 150 UHD PVC | | 60082489 |

0.8L/3.7Dz Patch Video Cable 75 Ω



| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082) | |

| Construction | |
|---------------------|--|
| Inner conductor | stranded copper wire, diameter 0.8 mm |
| Insulation | Foam-PE, diameter 3.7 mm |
| Outer conductor | 2xCu-braid, tinned 4.6 mm |
| Sheath | DMC FLEX PVC diameter 6.0 mm, black RAL 9005 |
| Printing | DRAKA 0.8L/3.7Dz - 75 Ω ± 1% |

| Electrical data at 20°C (nominal) | | | |
|--|------|-------------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 1.0 | 50 - 300 | ≥ 26 |
| 10 | 2.9 | 300 - 3000 | ≥ 22 |
| 100 | 9.8 | 3000 - 3500 | ≥ 18 |
| 800 | 29.3 | 3500 - 6000 | ≥ 15 |
| 1000 | 33.2 | | |
| 1500 | 40.9 | | |
| 3000 | 60.7 | | |
| 4000 | 70.1 | | |
| 6000 | 85.9 | | |

| Product Code Table | | |
|----------------------------|--------------------------|-----------------------|
| Product Description | PG Reference Code | PG Part Number |
| DR 0.8L/3.7Dz PVC/rubber | 60014488 | 60014492 |

1.0L/4.8Dz Patch Video Cable 75 Ω**Standards**

For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082)

Construction

| | |
|------------------------|--|
| Inner conductor | stranded copper wire, diameter 1.0 mm |
| Insulation | Foam-PE, diameter 4.8 mm |
| Outer conductor | 2xCu-braid, tinned |
| Sheath | DMC FLEX PVC diameter 7.0 mm, black RAL 9005 |
| Printing | DRAKA HD PRO FLEX 1.0L/4.8Dz - 75 Ω +- 1% |

Electrical data at 20°C (nominal)

| Attenuation (dB/100m) | | Return loss (dB) | |
|-----------------------|------|------------------|------|
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.9 | 50 - 300 | ≥ 26 |
| 10 | 2.0 | 300 - 3000 | ≥ 22 |
| 100 | 9.2 | 3000 - 3500 | ≥ 18 |
| 800 | 25.8 | 3500 - 6000 | ≥ 15 |
| 1000 | 32 | | |
| 1500 | 39.2 | | |
| 3000 | 59.1 | | |
| 4000 | 68.2 | | |
| 6000 | 83.4 | | |

Product Code Table

| Product Description | PG Reference Code | PG Part Number |
|--------------------------------|-------------------|----------------|
| R 1.0L/4.8Dz PVC/rubber, black | 60011389 | 60011389 |

1.2L/4.8Dz Patch Video Cable 75 Ω**Standards**

For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV, 4K, SMPTE 259M, SMPTE 292M, SMPTE 424M, SMPTE 2082)

Construction

| | |
|------------------------|--|
| Inner conductor | stranded copper wire, diameter 1.2 mm |
| Insulation | Foam-PE, diameter 4.8 mm |
| Outer conductor | 2xCu-braid, tinned |
| Sheath | DMC FLEX PUR, PUR, diameter 7.2 mm, green RAL 6018 |
| Printing | DRAKA 1.2L/4.8Dz - 75 Ω +- 1% - HDTV |

Electrical data at 20°C

| Attenuation (dB/100m) | | Return loss (dB) | |
|-----------------------|------|------------------|------|
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.5 | 50 - 300 | ≥ 26 |
| 10 | 1.9 | 300 - 3000 | ≥ 22 |
| 100 | 8.0 | 3000 - 3500 | ≥ 18 |
| 800 | 22 | 3500 - 6000 | ≥ 15 |
| 1000 | 25.2 | | |
| 1500 | 32 | | |
| 3000 | 49 | | |
| 6000 | 72.8 | | |

Product Code Table

| Product Description | PG Reference Code | PG Part Number |
|---------------------------------|-------------------|----------------|
| DR 1.2L/4.8DZ PUR rubber, green | 60016740 | 60016741 |

HD PRO 0.6/2.8 AF

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV) | |

| Flame resistance | |
|------------------|-------------------------------------|
| FRNC: | IEC 60332-1, IEC 60754-2, IEC 61034 |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 0.6 mm |
| Insulation | Foam-PE, diameter 2.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 3.4 mm |
| Sheath | FRNC, diameter 4.5 mm, Anthracite |
| Printing | DRAKA HD PRO 0.6/2.8 AF - 75 Ω ± 1% |

| Electrical data at 20°C | | | |
|-------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 1.2 | 50 - 300 | ≥ 26 |
| 3 | 1.9 | 300 - 3000 | ≥ 22 |
| 5 | 2.5 | 3000 - 3500 | ≥ 18 |
| 10 | 3.5 | 3500 - 5000 | ≥ 15 |
| 30 | 5.9 | | |
| 100 | 10.0 | | |
| 200 | 14.1 | | |
| 300 | 17.8 | | |
| 500 | 24.0 | | |
| 800 | 29.7 | | |
| 1000 | 33.2 | | |
| 1500 | 39.6 | | |
| 2250 | 50.2 | | |
| 3000 | 60.9 | | |
| 3500 | 65.8 | | |
| 4000 | 69.8 | | |
| 4500 | 74.2 | | |
| 5000 | 78.9 | | |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| HD PRO 0.6/2.8 AF | 60016731 | |

HD PRO 1.0/4.8 AF

| Standards | |
|---|--|
| For analogue and digital video signals (Composite, Component, SDI, SDV, SDTI, HDTV) | |

| Flame resistance | |
|------------------|-------------------------------------|
| FRNC: | IEC 60332-1, IEC 60754-2, IEC 61034 |

| Construction | |
|-----------------|---|
| Inner conductor | solid copper wire, bare, diameter 1.0 mm |
| Insulation | Foam-PE, diameter 4.8 mm |
| Outer conductor | Al-PET-Al-foil under tinned copper braid, diameter 5.6 mm |
| Sheath | FRNC, diameter 7.0 mm, Anthracite |
| Printing | DRAKA HD PRO 1.0/4.8 AF - 75 Ω ± 1% |

| Electrical data at 20°C | | | |
|-------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.8 | 50 - 300 | ≥ 26 |
| 3 | 1.3 | 300 - 3000 | ≥ 22 |
| 5 | 1.6 | 3000 - 3500 | ≥ 18 |
| 10 | 2.1 | 3500 - 5000 | ≥ 15 |
| 30 | 3.5 | | |
| 100 | 6.2 | | |
| 200 | 8.9 | | |
| 300 | 11.3 | | |
| 500 | 14.8 | | |
| 800 | 18.5 | | |
| 1000 | 20.7 | | |
| 1500 | 24.9 | | |
| 2250 | 31.7 | | |
| 3000 | 37.3 | | |
| 3500 | 41.5 | | |
| 4000 | 47.2 | | |
| 4500 | 51.2 | | |
| 5000 | 55.1 | | |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| HD PRO 1.0/4.8 AF | 1014490 | |

INDEX CAMERA CABLES


| | |
|---|----|
| SMPTE311M | 32 |
| SMPTE311M B2 _{ca} | 34 |
| SMPTE311M Hybrid High Flex Camera Cable | 35 |
| SMPTE 311M-HD-Hybrid-Camera Cable Outer diameter 15mm | 36 |
| Triaxial | 37 |
| Triax11 B2 _{ca} | 38 |
| Triflex | 39 |



3. CAMERA CABLES

In the Broadcast industry, the following cable constructions are used to connect a camera to the camera control unit:

- Triax cables
- SMPTE311M Hybrid camera cables

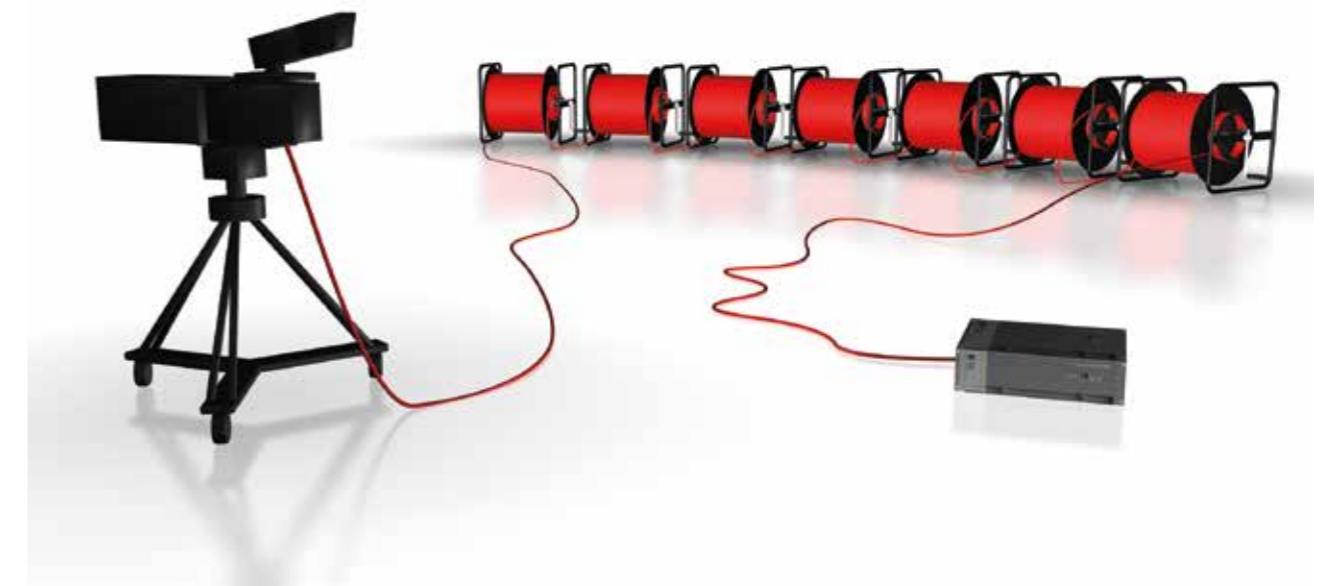



Standard Triax portfolio:

- Mobile use with permanent winding has been proofed robust in the different environments over decades.
- Simple and field mountable connector
- No cleaning of the optical lenses needed

SMPTE Hybrid Camera Cable according to SMPTE 311M:

- Camera cable for HDTV and super slow-motion application
- 2 buffered Single Mode fibres of type G.652.D2 or preferably G.657.A2/B2 BendBright-XS
- Outer jacket options: PU, TPE, LSZH
- Max. transmission using fibres is < 25KM
- Limitation to 2-4Km due to power supply
- Mobile use with permanent winding has been proofed
- Simple and field mountable connector

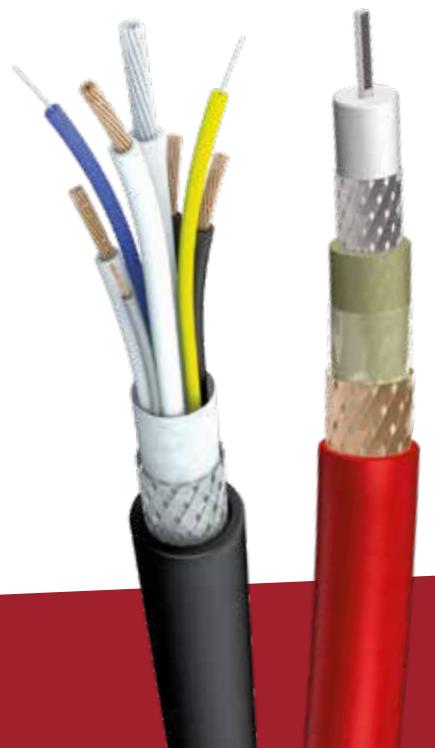

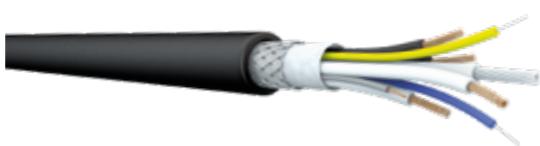E_{ca}
CPRC_{ca}
CPR

| Application | |
|---|--|
| This Hybrid HD Camera Cable 2SM 9/125 + 4 x AWG20 + 2 x AWG24 acc. to SMPTE 311M-Standard contains Single-Mode Optical Fibres, Auxiliary- and Signal Conductors. It is used in professional video productions for simultaneous transmission of energy, video, audio and control signals and is intended to interconnect Camera Units and Base Stations in conjunction with the Connector Interface Standard. It is suitable for all new digital camera systems of well-known manufacturers. | |

| Construction | | |
|---|--|---|
| Element 1: Auxiliary Conductors AWG20 (4 x 0.6 mm²) | | |
| Conductor | tinned stranded copper wires, 19 x 0.20 mm, diameter 1.0 mm | |
| Insulation | HDPE, diameter 1.5 mm (FRNC-C = LSOH) | |
| Identification | 2 x black, 2 x white | |
| Element 2: Signal Conductors AWG24 (2 x 0.22 mm²) | | |
| Conductor | tinned stranded copper wires, 7 x 0.20 mm, diameter 0.6 mm | |
| Insulation | HDPE, diameter 1.1 mm (FRNC-C = LSOH) | |
| Identification | 1 x red, 1 x grey | |
| Element 3: Fibre Optic Simplex Single Mode (2 x 9/125µ) (BBXS) | | |
| Mode field diameter | at 1310 nm, diameter 9.5 µm ± 1 µm | |
| Cladding diameter | diameter 125 µm ± 1 µm | |
| Concentricity error | ≤ 1 µm | |
| Coating material | UV-cross-linked Acrylate, diameter 245 µm | |
| Buffer material | Thermoplastic, diameter 0.9 µm ± 0.05 µm | |
| Identification | 1x blue, 1x yellow | |
| Strength Element | Aramid yarn | |
| Sheath | 1x blue, 1x yellow, diameter 1.6 mm | |
| Element 4: Strength Member AWG16 (1 x 1.22 mm²) | | |
| Conductor | galvanized steel wires, diameter 1.6 mm | |
| Insulation | HDPE, diameter 2.1 mm (FRNC-C = LSOH) | |
| Identification | 1 x white | |
| Stranding | Core: 1x Element 4, diameter 2.1 mm Layer: 4x Element 1 + 2x Element 2 + 2x Element 3, diameter 5.2 mm Sequence according to the above drawing | |
| Wrapping | 1x non-woven fabric tape, diameter 5.4 mm | |
| Screen | Copper wire braid, tinned, diameter 5.9 mm | |
| Sheath | PUR rubber, PUR or LSOH or FRNC-C (FRNC-C with additional Al-Pet foil) diameter 9.2 mm black, RAL 9005 | |
| Printing | PUR rubber PUR LSOH FRNC-C | DRAKA SMPTE 311 M Zero-Loss HD Cable Flex + batch no. + meter marking DRAKA SMPTE 311 M Zero-Loss HD Cable + batch no. + meter marking DRAKA SMPTE 311 M Zero-Loss HD Cable FRNC + batch no. + meter marking CPR class E _{ca} DRAKA SMPTE 311 M Zero-Loss HD Cable FRNC-C + batch no. + meter marking CPR class C _{ca} s1a d1 a1 |


| Mechanical properties at 20°C | | |
|-------------------------------|------------------|--|
| Temperature range PUR (FRNC) | during operation | - 40° C to + 70° C (- 25° C to + 70° C)) |
| Temperature range FRNC-C | during operation | - 20° C to + 70° C |
| Max. humidity | | 95 % |

| Electrical properties at 20°C | | |
|--|------------------|--------------------------|
| Auxiliary Conductors AWG20 (4 x 0.6 mm²) | | |
| DC resistance | during operation | ≤ 35.3 Ω/km |
| Loop resistance | | ≤ 70.6 Ω/km |
| Insulation resistance | | ≥ 10 ⁴ MΩ*km |
| Test voltage | | 1750 VAC _{rms} |
| Operating voltage | | ≤ 300 VAC _{rms} |
| Signal Conductors AWG24 (2 x 0.22 mm²) | | |
| DC resistance | | ≤ 97.5 Ω/km |
| Loop resistance | | ≤ 184 Ω/km |
| Insulation resistance | | ≥ 10 ⁴ MΩ*km |
| Test voltage | | 1750 VAC _{rms} |
| Operating voltage | | ≤ 300 VAC _{rms} |
| Overall screen | | |
| DC resistance | | ≤ 20 Ω/km |

| Optical properties at 20°C | | |
|---|------------|----------------|
| Fibre Optic Simplex Single Mode (2 x 9/125µ) | | |
| Cut-off wavelength | | 1100 – 1350 nm |
| Attenuation | at 1310 nm | 0.5 dB |
| Dispersion | at 1310 nm | 3.5 ps/nm*km |

| C25: Properties of cabled BendBright-XS Patch Cord fibre; ITU G.557 A2 and G.657 B2 | | |
|---|---------------------------------|--|
| General and Application | | |
| Draka BendBright-XS single-mode fibre combines three attractive features: excellent low macro-bending sensitivity, Draka's revolutionary new ColorLock® XS coating and tight glass geometry. Together they create the ideal performance for all patch cord, interconnect & jumper applications. | | |
| EC 60793-2-50 Category B6_a and B6_b | EN 50 173-1:2007, cat. OS2 | |
| EN 60793-2-50: Class B6_a and B6_b | ISO/IEC 11801:2002, cat. OS1 | |
| ITU Recommendation G.657.A2 and G.657.B2 (2009) | ISO/IEC 24702:2006 cat. OS2 | |
| ITU Recommendation G.652 designations A, B, C and D | and OS1 IEEE 802.3 – 2002 incl. | |

| Product Code Table | | |
|--|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| SMPTE 311M PUR 9.2mm | 60014967 | 60014967 |
| SMPTE 311M PUR Gummi 9.2mm | 60011474 | 60011474 |
| SMPTE 311M LSOH/FRNC 9.2mm cpr E _{ca} | 60014834 | 60014834 |
| SMPTE 311M FRNC-C 9.2mm cpr C _{ca} | 60049477 | 60049477 |
| SMPTE 311M PUR 15mm | 60056019 | 60056019 |
| SMPTE 311M PUR 16mm | 60028797 | 60028797 |

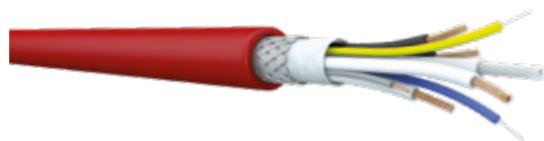SMPTE311M B2_{ca} Camera Cables**B2_{ca}
CPR**

| Application |
|---|
| This Hybrid HD Camera Cable 2SM 9/125 + 4 x AWG20 + 2 x AWG24 acc. to SMPTE 311M-Standard contains Single-Mode Optical Fibres, Auxiliary- and Signal Conductors. It is used in professional video productions for simultaneous transmission of energy, video, audio and control signals and is intended to interconnect Camera Units and Base Stations in conjunction with the Connector Interface Standard. It is suitable for all new digital camera systems of well-known manufacturers. |
| |

| Construction | |
|---|---|
| Element 1: Auxiliary Conductors AWG20 (4 x 0.6 mm²) | |
| Conductor | tinned stranded copper wires, 19 x 0.20 mm, diameter 1.0 mm |
| Insulation | HDPE, diameter 1.5 mm (FRNC-C = LSOH) |
| Identification | 2 x black, 2 x white |
| Element 2: Signal Conductors AWG24 (2 x 0.22 mm²) | |
| Conductor | tinned stranded copper wires, 7 x 0.20 mm, diameter 0.6 mm |
| Insulation | HDPE, diameter 1.1 mm (FRNC-C = LSOH) |
| Identification | 1 x red, 1 x grey |
| Element 3: Fibre Optic Simplex Single Mode (2 x 9/125µ) (BBXS) | |
| Mode field diameter | at 1310 nm, diameter 9.5 µm ± 1 µm |
| Cladding diameter | diameter 125 µm ± 1 µm |
| Concentricity error | ≤ 1 µm |
| Coating material | UV-cross-linked Acrylate, diameter 245 µm |
| Buffer material | Thermoplastic, diameter 0.9 µm ± 0.05 µm |
| Identification | 1 x blue, 1 x yellow |
| Strength Element | Aramid yarn |
| Sheath | 1 x blue, 1 x yellow, diameter 1.6 mm |
| Element 4: Strength Member AWG16 (1 x 1.22 mm²) | |
| Conductor | galvanized steel wires, diameter 1.6 mm |
| Insulation | HDPE, diameter 2.1 mm (FRNC-C = LSOH) |
| Identification | 1 x white |

| Product Code Table | | |
|--------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| SMPTE311M B2 _{ca} red | 60071178 | 60071178 |

SMPTE311M Hybrid High Flex Camera Cable

| Application |
|---|
| This Hybrid HD Camera Cable 2SM 9/125 + 4 x AWG20 + 2 x AWG24 acc. to SMPTE 311M-Standard contains Single-Mode Optical Fibres, Auxiliary- and Signal Conductors. It is used in professional video productions for simultaneous transmission of energy, video, audio and control signals and is intended to interconnect Camera Units and Base Stations in conjunction with the Connector Interface Standard. It is suitable for all new digital camera systems of well-known manufacturers. |

| Standards |
|------------|
| SMPTE 311M |

| Construction | |
|---|--|
| Element 1: Auxiliary Conductors AWG20 (4 x 0.6 mm²) | |
| Conductor | tinned stranded copper wires, 19 x 0.20 mm, diameter 1.0 mm |
| Insulation | HDPE, diameter 1.5 mm |
| Identification | 2 x black, 2 x white |
| Element 2: Signal Conductors AWG24 (2 x 0.22 mm²) | |
| Conductor | tinned stranded copper wires, 7 x 0.20 mm, diameter 0.6 mm |
| Insulation | HDPE, diameter 1.1 mm |
| Identification | 1 x red, 1 x grey |
| Element 3: Fibre Optic Simplex Single Mode (2 x 9/125µ) (BBXS) | |
| Mode field diameter | at 1310 nm, diameter 9.5 µm ± 1 µm |
| Cladding diameter | diameter 125 µm ± 1 µm |
| Concentricity error | ≤ 1 µm |
| Coating material | UV-cross-linked Acrylate, diameter 245 µm |
| Buffer material | Thermoplastic, diameter 0.9 µm ± 0.05 µm |
| Identification | 1 x blue, 1 x yellow |
| Strength Element | Aramid yarn |
| Sheath | 1 x blue, 1 x yellow, diameter 1.6 mm |
| Element 4: Strength Member AWG16 (1 x 1.22 mm²) | |
| Conductor | galvanized steel wires, diameter 1.6 mm |
| Insulation | HDPE, diameter 2.1 mm |
| Identification | 1 x white |
| Stranding | Core: 1x Element 4, diameter 2.1 mm Layer: 4x Element 1 + 2x Element 2 + 2x Element 3, diameter 5.2 mm Sequence according to the above drawing |
| Wrapping | 1 x non-woven fabric tape, diameter 5.4 mm |
| Screen | Copper wire braid, tinned, diameter 5.9 mm |
| Sheath | PUR rubber, diameter 9.2 mm, black, RAL 9005 |
| Printing PUR rubber | DRAKA SMPTE 311 M Hybrid High Flex Camera Cable |

SMPTE 311M-HD-Hybrid-Camera Cable

Outer diameter 15mm



| Application |
|---|
| This Hybrid HD Camera Cable 2SM 9/125 + 4 x AWG20 + 2 x AWG24 acc. to SMPTE 311M-Standard contains Single-Mode Optical Fibres, Auxiliary- and Signal Conductors. It is used in professional video productions for simultaneous transmission of energy, video, audio and control signals and is intended to interconnect Camera Units and Base Stations in conjunction with the Connector Interface Standard. It is suitable for all new digital camera systems of well-known manufacturers. |

| Construction | |
|---|--|
| Element 1: Auxiliary Conductors AWG20 (4 x 0.6 mm²) | |

| | |
|----------------|---|
| Conductor | tinned stranded copper wires, 19 x 0.20 mm, diameter 1.0 mm |
| Insulation | HDPE, diameter 1.5 mm |
| Identification | 2 x black, 2 x white |

| Element 2: Signal Conductors AWG24 (2 x 0.22 mm ²) | |
|--|--|
| Conductor | tinned stranded copper wires, 7 x 0.20 mm, diameter 0.6 mm |
| Insulation | HDPE, diameter 1.1 mm |
| Identification | 1 x red, 1 x grey |

| Element 3: Fibre Optic Simplex Single Mode (2 x 9/125µ) (BBXS) | |
|--|---|
| Mode field diameter | at 1310 nm, diameter 9.5 µm ± 1 µm |
| Cladding diameter | diameter 125 µm ± 1 µm |
| Concentricity error | ≤ 1 µm |
| Coating material | UV-cross-linked Acrylate, diameter 245 µm |
| Buffer material | Thermoplastic, diameter 0.9 µm ± 0.05 µm |
| Identification | 1 x blue, 1 x yellow |

| Element 4: Strength Member AWG16 (1 x 1.22 mm ²) | |
|--|--|
| Conductor | galvanized steel wires, diameter 1.6 mm |
| Insulation | HDPE, diameter 2.1 mm |
| Identification | 1 x white |
| Stranding | Core: 1x Element 4, diameter 2.1 mm Layer: 4x Element 1 + 2x Element 2 + 2x Element 3, diameter 5.2 mm Sequence according to the above drawing |
| Wrapping | 1x non-woven fabric tape, diameter 5.4 mm |
| Screen | Copper wire braid, tinned, diameter 5.9 mm |
| Sheath | PUR, diameter 9.2 mm, black, RAL 9005 Chalk between the jackets at 9.2mm |
| | PUR Rubber, 15.0mm |
| Printing | DRAKA SMPTE 311M HD Cable 15mm + batch number + meter marking |

| Product Code Table | | |
|-------------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| SMPTE 311M Hybrid Camera Cable 15mm | 60056019 | 60056019 |

Triaxial Camera Cables



E_{ca}
CPR

| Application |
|---|
| Triaxial camera cables are used in professional studio applications for simultaneous transmission of energy and multiplex image signals between camera head and control system for SDI and HD-SD. They are available as different types optimized for use inside studios and outdoor application. |

| Construction | |
|---------------------|--|
| Inner conductor | solid copper wire, silvered or stranded copper wires, silvered |
| Insulation | Foam-PE |
| 1st outer conductor | copper braid, thick silvered |
| Insulation | PE |
| 2nd outer conductor | copper braid, bare |
| Sheath | PVC, PUR (standard or reinforced type) or FRNC, red RAL 3000 altern. black or grey |

| Dimensions | | Triax 8 | Triax 11, Triax 11/1 | Triax 14 |
|-----------------|-------------------------|--|---|---|
| Inner conductor | copper wire, silvered | Ø 1.0 mm | Ø 1.4 mm | - |
| Stranded | copper wires, silvered | - | - | Ø 2.2 mm |
| Insulation | foam-PE | Ø 4.5 mm | Ø 6.5 mm | Ø 9.7 mm |
| Inner screen | copper braid, silvered | Ø 5.1 mm | Ø 7.1 mm | Ø 10.5 mm |
| Insulation | PE | Ø 6.6 mm | Ø 8.6 mm | Ø 11.9 mm |
| Outer screen | copper braid, bare | Ø 7.2 mm | Ø 9.2 mm | Ø 12.7 mm |
| Sheath | red RAL 3000 reinforced | Ø 8.4 mm | Ø 10.9 mm | Ø 14.5 mm |
| | | Ø 8.9 mm | Ø 12.2 mm | - |
| Sheath marking | (example: PVC sheath) | « DRAKA TRIAX 8 - Y HDTV » + batch no. | « DRAKA TRIAX 11 - Y HDTV » + batch no. | « DRAKA TRIAX 14 - Y HDTV » + batch no. |

| Product Code Table | | |
|-------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Triax 8 PVC red | 60011499 | 60011499 |
| Triax 8 PVC black | 60011499 | 60014209 |
| Triax 8 PUR red | | 60014203 |
| Triax 8 PUR black | | 60014205 |
| Triax 8 FRNC red | 60014554 | 60014554 |
| Triax 8 red FRNC reinforced | 60014211 | 60014211 |
| Triax 11 PVC red | 60014214 | 60014214 |
| Triax 11 PVC black | 60014218 | 60014218 |
| Triax 11 PE black | 60014219 | 60014219 |
| Triax 11 PUR red | 60014222 | 60014222 |
| Triax 11 PUR black | 60014224 | 60014224 |
| Triax 11/1 PUR reinforced red | 60014245 | 60014245 |
| Triax 11 FRNC red | 60009614 | 60009614 |
| Triax 14 PVC red | 60011506 | 60011506 |
| Triax 14 PE | 60014238 | 60014238 |
| Triax 14 FRNC red | 60013643 | 60013643 |
| Triax 14 PUR red | 60014244 | 60014244 |

Triax11

**C_{ca}
CPR**

| Standards | |
|------------------------|--|
| IEC 61034, IEC 60754-1 | |

| Flame resistance | |
|--|--|
| IEC 60332-3-24, IEC 60332-1-2, CPR class: C _{ca} s1 d1 a1 | |

| Construction | |
|---------------------|--|
| Inner conductor | solid copper wire, silvered or stranded copper wires, silvered |
| Insulation | Foam-PE |
| 1st outer conductor | copper braid, thick silvered |
| Insulation | PE |
| 2nd outer conductor | copper braid, bare |
| Sheath | FRNC, red RAL 3000 or black or grey |

| Dimensions | |
|-----------------|--|
| | Triax 11 B2 _{ca} |
| Inner conductor | copper wire, silvered |
| Insulation | Ø 1.4 mm |
| Inner screen | FRNC |
| Insulation | Ø 6.5 mm |
| Outer screen | copper braid, silvered |
| Insulation | Ø 7.1 mm |
| PET-Al foil | PE |
| Outer screen | Ø 8.5 mm |
| Sheath | copper braid, tinned |
| Sheath | Ø 8.7 mm |
| Sheath | FRNC, red RAL 3000 |
| Sheath marking | Ø 9.3 mm |
| | Ø 11.0 mm |
| | "DRAKA TRIAX 11 - HDTV FRNC-C C ca s1a d1 <CE_Mark> + batch no.+ meter marking |

| Electrical data at 20°C | | | |
|-------------------------|------|------------------|------|
| Attenuation (dB/100m) | | Return loss (dB) | |
| Frequency (MHz) | | Frequency (MHz) | |
| 1 | 0.5 | 1 - 100 | > 26 |
| 5 | 1.1 | 100 - 300 | > 26 |
| 10 | 1.6 | 300 - 850 | > 23 |
| 20 | 2.3 | 850 - 3000 | > 20 |
| 40 | 3.3 | | |
| 50 | 3.7 | | |
| 60 | 4.1 | | |
| 100 | 5.4 | | |
| 300 | 10.3 | | |

| Product Code Table | | |
|---------------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Triax 11 C _{ca} s1 d1 a1 red | 60089222 | 60089222 |

Triflex Camera Cable

| Application | |
|---|--|
| Triaxial camera cables are used in professional studio applications for simultaneous transmission of energy and multiplex image signals between camera head and control system. They are available as different types optimized for use inside studios and outdoor application. | |

| Construction | |
|---------------------|--|
| Inner conductor | stranded copper wires, silvered |
| Insulation | Foam-PE, natural coloured |
| 1st outer conductor | copper braid, silvered |
| Insulation | thermoplastic elastomer, natural coloured |
| 2nd outer conductor | copper braid, bare |
| Sheath | PVC-special, altern. PU, altern. PU-special, red, RAL 3000, altern. black RAL 9005 |

| Dimensions | |
|-----------------|--------------------------------|
| | Triflex 8, Triflex 8/1 |
| Inner conductor | stranded copper wire, silvered |
| Insulation | Ø 1.0 mm |
| Outer screen | foam-PE |
| Insulation | Ø 1.4 mm |
| Outer screen | copper braid, silvered |
| Sheath | Ø 6.5 mm |
| Sheath | thermoplastic elastomer |
| Outer screen | Ø 7.1 mm |
| Sheath | copper braid, bare |
| Sheath | Ø 8.6 mm |
| Outer screen | Ø 9.2 mm |
| Sheath | Ø 10.9 mm |
| Sheath marking | reinforced |
| Sheath marking | Ø 8.9 mm |
| | - |
| | DRAKA TRIFLEX 8 - 11Y HDTV |
| | DRAKA TRIFLEX 11 - 11Y HDTV |

| Product Code Table | | |
|------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Triflex 8 Special PVC | 60014250 | |
| Triflex 8 PU | 60014267 | |
| Triflex 8/1 Flex PU | 60014270 | |
| Triflex 11 Special PVC | 60014257 | |
| Triflex 11 PU | 60014276 | |

INDEX AUDIO CABLES

| | |
|---|----|
| Microphone Cable Micro 22 | 42 |
| Microphone Cable Micro 22 FRNC | 43 |
| Microphone Cable XLR PRO FLEX FRNC | 44 |
| Microphone Cable XLR PRO FLEX | 45 |
| Multicore Audio Cable AC10 SP24/7 x pairs | 46 |
| Multicore Audio Cable AC10 SS24/7 x pairs | 47 |
| Multicore Audio Cable AC10 SS26/7 x pairs | 48 |
| Multicore Audio Cable AC10 SS23/1 x pairs | 49 |
| Speaker 1.5mm ² , Lif-YY 2 x 1.5 mm ² | 50 |
| Speaker 2.5mm ² , Lif-YY 2 x 2.5 mm ² | 51 |
| Speaker 1.5, Lif-HH nx1.5 mm ² FRNC-C | 52 |
| Speaker 2.5, Lif-HH nx2.5 mm ² FRNC-C | 53 |
| Speaker 4.0, Lif-HH nx4.0 mm ² FRNC-C | 54 |
| Speaker 6.0, Lif-HH nx6.0 mm ² FRNC-C | 55 |

4. AUDIO CABLES

In the Broadcast industry, the following cable constructions are used to transmit audio content:

- Microphone cables: stranded copper wires AWG 24/7
- Mobile Audio cables for Stage and outside Broadcast application
- for inside use / application in a studio, TV station and stadium

Microphone cables portfolio:

- Micro 22
- XLR PRO FLEX

More designs on request or in the Music Industry (MI) catalogue

Mobile Audio cables:

- AC10 SP 24/7 nxP
(High Flex Multicore audio cable with a stranded innerconductor)
- AC10 SS 24/7 nxP
(Flex Multicore audio cable with a stranded innerconductor)
- Digitalsound
(Multicore audio cable with a stranded innerconductor and PU jacket)

Installation Audio cables:

- AC10 SS 26/7 nxP
(Multicore audio cable with a stranded innerconductor for studio environment)
- AC10/SS 23/1 nxP
(Multicore audio cable with a solid innerconductor for long distances, mainly for stadium environment)



Microphone Cable Micro 22

| Application | |
|---|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. Not for fixed installation in construction works. | |

| Construction | |
|----------------|--|
| Conductor | stranded copper wires, bare 28x0.10 mm, diameter 0.61 mm |
| Insulation | PVC, diameter 1.2 mm ± 0.05 mm |
| Core colour | blue, red |
| Pair stranding | 2 cores and two cotton fillers |
| Pair screen | spiraled copper wires, bare, diameter 2.6 mm |
| Sheath | PVC/rubber, diameter 6.0 mm ± 0.2 mm, matt black RAL 9005, red RAL 3000 or blue RAL 5013 |
| Printing | DRAKA MICRO 22 + batch number + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 30° C to + 70° C |

| Electrical properties at 20°C | | |
|--|-----------------------|-----------------------|
| DC resistance | 20°C | ≤ 90 Ω/km |
| Mutual capacitance (1 kHz, reference value) | core/core | 135 pF/m |
| | core/screen | 230 pF/m |
| Insulation resistance | 20 °C ± 5 °C, 500 VDC | ≥ 200 MΩxkm |
| Test voltage AC (50 Hz; 1min) | core/core | 0.5 kV _{rms} |
| | core/screen | 1.0 kV _{rms} |

| Product Code Table | | |
|-------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR MICRO 22 PVC rubber, black | 60010081 | 60010081 |

Microphone Cable Micro 22 FRNC

| Application | |
|---|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. Not for fixed installation in construction works. | |

| Construction | |
|----------------|--|
| Conductor | stranded copper wires, bare 28x0.10 mm, diameter 0.61 mm |
| Insulation | PE, diameter 1.2 mm ± 0.05 mm |
| Core colour | blue, red |
| Pair stranding | 2 cores and two cotton fillers |
| Pair screen | Double spiraled copper wires, bare, diameter 2.6 mm |
| Sheath | FRNC, diameter 5.8 mm ± 0.2 mm, matt black RAL 9005 |
| Printing | DRAKA MICRO 22 FRNC + batch number + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 20° C to + 70° C |

| Electrical properties at 20°C | | |
|--|-----------------------|-----------------------|
| DC resistance | 20°C | ≤ 90 Ω/km |
| Mutual capacitance (1 kHz, reference value) | core/core | 135 pF/m |
| | core/screen | 230 pF/m |
| Insulation resistance | 20 °C ± 5 °C, 500 VDC | ≥ 200 MΩxkm |
| Test voltage AC (50 Hz; 1min) | core/core | 0.5 kV _{rms} |
| | core/screen | 1.0 kV _{rms} |

| Product Code Table | | |
|-------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DR MICRO 22 PVC rubber, black | 60052851 | 60052851 |



| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. | |

| Construction | |
|----------------|--|
| Conductor | stranded copper wires, bare, diameter 0.60 mm |
| Insulation | Foam-PE + skin-layer, diameter 1.5 mm |
| Core colour | a – core: white; b – core: blue |
| Pair stranding | two cores twisted to the bundle + cotton filler, diameter 3.0 mm |
| Pair screen | spiralled wires, CU bare, diameter 3.2 mm |
| Sheath | FRNC, diameter 6.5 mm ± 0.2 mm, black RAL 9005 |
| Printing | DRAKA - XLR PRO FLEX analogue / digital - 110 Ω FRNC |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | during operation | - 20° C to + 70° C |
| | during installation | - 5° C to + 50° C |

| Product Code Table | | |
|----------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| XLR PRO FLEX , PVC rubber, black | 60014859 | 60014859 |

Microphone Cable XLR PRO FLEX



| Application | | Standards |
|--|--|----------------------------|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. | | AES/EBU and analogue Audio |

| Construction | |
|----------------|--|
| Conductor | stranded copper wires, bare, diameter 0.60 mm |
| Insulation | Foam-PE + skin-layer, diameter 1.5 mm |
| Core colour | a – core: white; b – core: blue |
| Pair stranding | two cores twisted to the bundle + cotton filler, diameter 3.0 mm |
| Pair screen | spiralled wires, CU bare, diameter 3.2 mm |
| Sheath | DMC FLEX PVC, diameter 6.5 mm ± 0.2 mm, black RAL 9005 |
| Printing | DRAKA - XLR PRO FLEX analogue / digital - 110 Ω |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | during operation | - 30° C to + 70° C |
| | during installation | - 5° C to + 50° C |

| Product Code Table | | |
|----------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| XLR PRO FLEX , PVC rubber, black | 60014961 | 60014961 |

Multicore Audio Cable AC10 SP24/7 x pairs

Mobile use



| Application | Standards |
|--|--------------------------------|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. Not for fixed installation in construction works | acc. To AES/EBU-Recommendation |

| Construction | |
|---------------------|---|
| Inner conductor | stranded copper wires, bare, diameter 0.60 mm (AWG24/7) (cross section 0.22 mm ²) |
| Insulation | Foam-skin-PE , diameter 1.40 mm |
| Pair stranding | two cores twisted to the pair |
| Pair identification | a – core: white, b – core: blue (the above colours in regular intervals) |
| Pair screen | One layer of spiraled bare copper wires, + stranded copper drain wires, diameter 3.0 mm |
| Pair insulation | PVC, diameter 3.8 mm |
| Identification | black, RAL 9005 with number printing |
| Cable lay up | n pairs twisted in layers |
| Sheath | PVC/rubber blue RAL 5013 |
| Printing | DRAKA – AC10 SP 24/7 nxP AES/EBU – 110 Ω + batch number + meter marking |

| Product Code Table | | |
|----------------------|--------------|----------------|
| Product Description | Product Code | PG Part Number |
| AC10 SP 24/7 2P PVC | 1001992 | |
| AC10 SP 24/7 4P PVC | 1001994 | |
| AC10 SP 24/7 8P PVC | 1001996 | |
| AC10 SP 24/7 10P PVC | 1001998 | |
| AC10 SP 24/7 12P PVC | 1001999 | |
| AC10 SP 24/7 16P PVC | 1002001 | |

Multicore Audio Cable AC10 SS24/7 x pairs

Mobile use



| Application | Standards |
|--|--------------------------------|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. Not for fixed installation in construction works | acc. To AES/EBU-Recommendation |

| Construction | |
|---------------------|---|
| Inner conductor | stranded copper wires, bare, diameter 0.60 mm (AWG24/7) (cross section 0.22 mm ²) |
| Insulation | Foam-skin-PE , diameter 1.40 mm |
| Pair stranding | two cores twisted to the pair |
| Pair identification | a – core: white, b – core: blue (the above colours in regular intervals) |
| Pair screen | Al-PET-foil, Aluminum inside, + stranded copper drain wires, tinned, diameter 3.0 mm |
| Pair insulation | PVC, diameter 3.6 mm |
| Identification | black, RAL 9005 with number printing |
| Cable lay up | n pairs twisted in layers |
| Overall screen | Al-PET-foil + stranded copper drain wires, tinned |
| Sheath | PVC/rubber, blue RAL 5013 |
| Printing | DRAKA – AC10 SS 24/7 nxP AES/EBU – 110 Ω + batch number + meter marking |

| Product Code Table | | |
|----------------------|--------------|----------------|
| Product Description | Product Code | PG Part Number |
| AC10 SS 24/7 2P PVC | 60044801 | 60044801 |
| AC10 SS 24/7 4P PVC | 60044802 | 60044802 |
| AC10 SS 24/7 8P PVC | 60026179 | 60026179 |
| AC10 SS 24/7 10P PVC | 60014828 | 60014828 |
| AC10 SS 24/7 12P PVC | 60044803 | 60044803 |
| AC10 SS 24/7 16P PVC | 60010353 | 60010353 |
| AC10 SS 24/7 24P PVC | | |
| AC10 SS 24/7 32P PVC | | |

Multicore Audio Cable AC10 SS26/7 x pairs

For Installation



D_{ca}
CPR

E_{ca}
CPR

| Application |
|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. Not for fixed installation in construction works |

| Standards |
|---------------------------|
| CPR Class D _{ca} |

| Construction | |
|--------------------------------------|---|
| Conductor | stranded copper wires, bare ø 0.48 mm (cross section 0.14 mm ²) øAWG26/7 mm |
| Insulation | Foam-skin-PE , diameter 1.2 mm |
| Pair stranding | two cores twisted to the pair |
| Pair identification | a - core: white, b - core: blue (the above colours in regular intervals) |
| Pair screen | Al-PET-foil, Aluminum inside ø 2.5 mm + stranded copper drain wires, tinned |
| Pair insulation of 1 pair cable | PET-foil |
| Pair sheath of the Multi pair cables | FRNC, flame retardant |
| Colour and identification | grey RAL 7001 with number printing |
| Cable lay up | n pairs twisted in layers |
| Overall screen | Al-PET-foil + copper braid, tinned |
| Sheath | FRNC-C, grey RAL 7001 |
| Sheath marking | DRAKA MULTIMEDIA CABLE - GERMANY - AC10 SS 26/7 nP AES/EBU - 110 Ω |

Multicore Audio Cable AC10 SS23/1 x pairs

For Installation



D_{ca}
CPR

E_{ca}
CPR

| Application |
|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. |

| Standards |
|---|
| Basing upon ARD-Specification and acc. to AES/EBU-Recommendation. FRNC-C, IEC 60332-3-24, CPR class: D _{ca} |

| Product Code Table | | |
|-------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| AC10 SS 26/7 8P FRNC-C | 60010079 | 60010079 |
| AC10 SS 26/7 2P FRNC-C | 60011555 | 60011555 |
| AC10 SS 26/7 4P FRNC-C | 60011556 | 60011556 |
| AC10 SS 26/7 1P FRNC-C | 60011576 | 60011576 |
| AC10 SS 26/7 6P FRNC-C | 60013624 | 60013624 |
| AC10 SS 26/7 10P FRNC-C | 60013628 | 60013628 |
| AC10 SS 26/7 12P FRNC-C | 60013631 | 60013631 |
| AC10 SS 26/7 16P FRNC C | 60013635 | 60013635 |
| AC10 SS 26/7 24P FRNC-C | 60013674 | 60013674 |

| Product Code Table | | |
|------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| AC10 SS 23/11P FRNC-C | | 60013604 |
| AC10 SS 23/12P FRNC-C | | 60013616 |
| AC10 SS 23/14P FRNC-C | | 60013618 |
| AC10 SS 23/18P FRNC-C | | 60013602 |
| AC10 SS 23/110P FRNC-C | | 60013613 |
| AC10 SS 23/112P FRNC-C | | 60013614 |

Speaker 1.5mm², Lif-YY 2 x 1.5 mm²

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. | |

| Construction | |
|--------------|--|
| Conductor | stranded copper wires, bare, diameter 1.6 mm |
| Insulation | PVC, diameter 2.4 mm |
| Core colour | black, red |
| Stranding | 2 cores twisted to the pair, diameter 4.8 mm |
| Sheath | PVC/rubber, diameter 6.2 ± 0.2 mm, matt black RAL 9005 |
| Printing | DRAKA - Speaker 2x1.5 + meter marking + batch number |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 30° C to + 70° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 13 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 2 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | | |
|--------------------------------|--------------|-------------------|----------------|
| Product Description | Product Code | PG Reference Code | PG Part Number |
| Speaker 2 x 1.5mm ² | 1002085 | | 60014992 |

Speaker 2.5mm², Lif-YY 2 x 2.5 mm²

| Application | Flame resistance |
|--|---|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. | PVC: not for fixed installation in construction works |

| Construction | |
|--------------|---|
| Conductor | stranded copper wires, bare, diameter 2.05 mm |
| Insulation | PVC, diameter 3.05 mm |
| Core colour | 2 cores: black, red 4 cores: black, red, blue, white 6 cores: black, red, blue, white, yellow, brown 8 cores: black, red, blue, white, yellow, brown, green, black |
| Stranding | n cores twisted to the bundle |
| Sheath | PVC/rubber, matt black RAL 9005 |
| Printing | DRAKA - Speaker nx2.5 + batch number + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|---------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 30° C to + 70° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 8 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 2 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | | |
|---------------------|--------------|-------------------|----------------|
| Product Description | Product Code | PG Reference Code | PG Part Number |
| DR Speaker 2x2.5 | 1002087 | | 60014994 |
| DR Speaker 4x2.5 | 1002089 | | 60014996 |

Speaker 1.5, Lif-HH nx1.5 mm² FRNC-C

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. | |

| Flame resistance | |
|------------------|-----------------|
| IEC | 60332-3-24 |
| FRNC | FRNC-C |
| CPR class | D _{ca} |

| Construction | |
|--------------|--|
| Conductor | stranded copper wires, bare, diameter 1.6 mm |
| Insulation | LSHF-FR, diameter 2.4 mm |
| Core colour | black, red |
| Stranding | 2 cores twisted to the pair, diameter 4.8 mm |
| Sheath | FRNC_C, diameter 6.2 ± 0.2 mm, matt black RAL 9005 |
| Printing | DRAKA - Speaker nx1.5 FRNC <factory code/batch no./date-time> + meter marking MADE IN GERMANY |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|-----------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 20° C to + 60° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 13 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 4 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | |
|-------------------------------------|----------------------------|--------------|
| Product Description | Standard delivery length m | Product Code |
| Speaker 2x1.5mm ² FRNC-C | 500 | 60073567 |
| Speaker 2x1.5mm ² FRNC-C | 200 | 60073566 |
| Speaker 2x1.5mm ² FRNC-C | 100 | 60073565 |

Speaker 2.5, Lif-HH nx2.5 mm² FRNC-C

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. | |

| Flame resistance | |
|------------------|-----------------|
| IEC | 60332-3-24 |
| FRNC | FRNC-C |
| CPR class | D _{ca} |

| Construction | |
|--------------|--|
| Conductor | stranded copper wires, bare, diameter 2.05 mm |
| Insulation | LSHF-FR, diameter 3.05 mm |
| Core colour | 2 cores: black, red |
| Stranding | 2 cores twisted to the bundle |
| Sheath | FRNC matt black, RAL 9005 |
| Printing | DRAKA - Speaker 2 x 2.5 FRNC-C <factory code/batch no./date-time> + meter marking + MADE IN GERMANY |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|-----------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 20° C to + 60° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 08 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 2 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | | |
|-------------------------------------|----------------------------|-------------------|--------------|
| Product Description | Standard delivery length m | Outer diameter mm | Product Code |
| Speaker 2x2.5mm ² FRNC-C | 500 | 8.1 | 60073570 |
| Speaker 4x2.5mm ² FRNC-C | 500 | 11.5 | |

Speaker 4.0, Lif-2HH 2x4.0 mm² FRNC-C

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. | |

| Flame resistance | |
|------------------|-----------------|
| IEC | 60332-3-24 |
| FRNC | FRNC-C |
| CPR class | D _{ca} |

| Construction | |
|--------------|--|
| Conductor | stranded copper wires, bare, diameter 2.65 mm |
| Insulation | LSHF-FR, diameter 3.85 mm |
| Core colour | 2 cores: black, red |
| Stranding | 2 cores twisted to the bundle |
| Sheath | FRNC-C, matt black, RAL 9005 |
| Printing | DRAKA - Speaker 2 x 4.0 FRNC-C <factory code/batch no. /date-time> + meter marking + MADE IN GERMANY |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|-----------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 20° C to + 60° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 4.9 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 4 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | | |
|-------------------------------------|----------------------------|-------------------|--------------|
| Product Description | Standard delivery length m | Outer diameter mm | Product Code |
| Speaker 2x4.0mm ² FRNC-C | 500 | 9.1 | 60073573 |
| Speaker 4x4.0mm ² FRNC-C | 500 | 12.0 | |

Speaker 6.0, Lif-2HH 2x6.0 mm² FRNC-C

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue audio signals. | |

| Flame resistance | |
|------------------|-----------------|
| IEC | 60332-3-24 |
| FRNC | FRNC-C |
| CPR class | D _{ca} |

PUR jacket: no flame resistance

| Construction | |
|-----------------|--|
| Conductor | stranded copper wires, bare, diameter 3.2 mm |
| Insulation FRNC | LSHF-FR, diameter 4.9 mm |
| Insulation PUR | PE, diameter 4.9 mm |
| Core colour | 2 cores: black, red |
| Stranding | 2 cores twisted to the bundle |
| Sheath | FRNC-C, matt black, RAL 9005 |
| Printing FRNC-C | DRAKA - Speaker n x 6.0 FRNC-C <factory code/batch no. /date-time> + meter marking + MADE IN GERMANY |
| Printing PUR | DRAKA - Speaker n x 6.0 PUR <factory code/batch no. /date-time> + meter marking + MADE IN GERMANY |

| Mechanical properties at 20°C | | |
|-------------------------------|-----------------|-----------------------------|
| Minimum bending radius | without load | 4 x D (D= outer diameter) |
| | with load | 8 x D (D= outer diameter) |
| Temperature range | mobile use | - 5° C to + 50° C |
| | fixed operation | - 20° C to + 60° C |

| Electrical properties at 20°C | | |
|-------------------------------|-----------------------------------|--------------------------|
| DC resistance | 20°C | ≤ 4.9 Ω/km |
| Insulation resistance | 20 °C ± 5 °C. 500 V _{DC} | ≥ 200 MΩxkm |
| Test voltage | core/core: AC (50 Hz; 1min) | 4 kV _{rms} |
| Operating voltage | | 50/75 V _{AC/DC} |

| Product Code Table | | | |
|-------------------------------------|----------------------------|-------------------|--------------|
| Product Description | Standard delivery length m | Outer diameter mm | Product Code |
| Speaker 4x6.0mm ² FRNC-C | 500 | 14.2 | 60066374 |
| Speaker 4x6.0mm ² PUR | 500 | 12.0 | |
| Speaker 6x6.0mm ² FRNC-C | 500 | 17.7 | 90151121 |
| Speaker 8x6.0mm ² FRNC-C | 500 | 22.6 | 90151122 |



INDEX COPPER DATA CABLES

| | |
|--|----|
| Media Install Indoor 10G MII S23 | 58 |
| Media Install Indoor 10G MII SS23 | 59 |
| Media Install Synchron MIS 23 | 60 |
| Media Flex Outdoor 10G MFO 26 | 61 |
| Media Flex Outdoor 10G MFO 23 | 62 |
| Media Flex Indoor 10G MFI 26 | 63 |
| Digital Control Cable 2 x 0.22mm ² B2 _{ca} | 64 |
| DMX + 3x2.5mm ² | 65 |
| DMX 234 AES/EBU (2x 0.34mm ²) FRNC | 66 |
| DMX 434 FRNC or PVC | 67 |

5. COPPER DATA CABLES

- Installation cables:
- CU- Patch cables for Outdoor applications
- CU-Patch cables for Inhouse applications

Standard Installation cables :

- MII S23, Media Install Indoor 10Gig
- MII SS23, Media Install Indoor, 10Gig
- MIS 23, Media Install Synchron, Indoor 10Gig

CU- Patch cables for Outdoor applications:

- MFO 26, Media Flex Outdoor, 10Gig
- MFO 24, Media Flex Outdoor, 10Gig
- MFO 23, Media Flex Outdoor, 10Gig


CU- Patch cables for Inhouse applications:

- MFI 26, Media Flex OIndoor, 10Gig

| Transmission length of MFO 23 | |
|-------------------------------|-------------------------|
| Interface/Protocol | Transmission length [m] |
| AES50 | 120 |
| HD base T | 110 |
| MADI HD | 120 |
| Riedel RockNet | 140 |
| AES 3 - 2003 (48kHz, 96kHz) | 240 |

AVB (Audio Video Bridging) :

Describes a number of standards of the Audio/Video Bridging Task Group (IEEE 802.1) for synchronized streaming of Video- and Audio content via a data network.

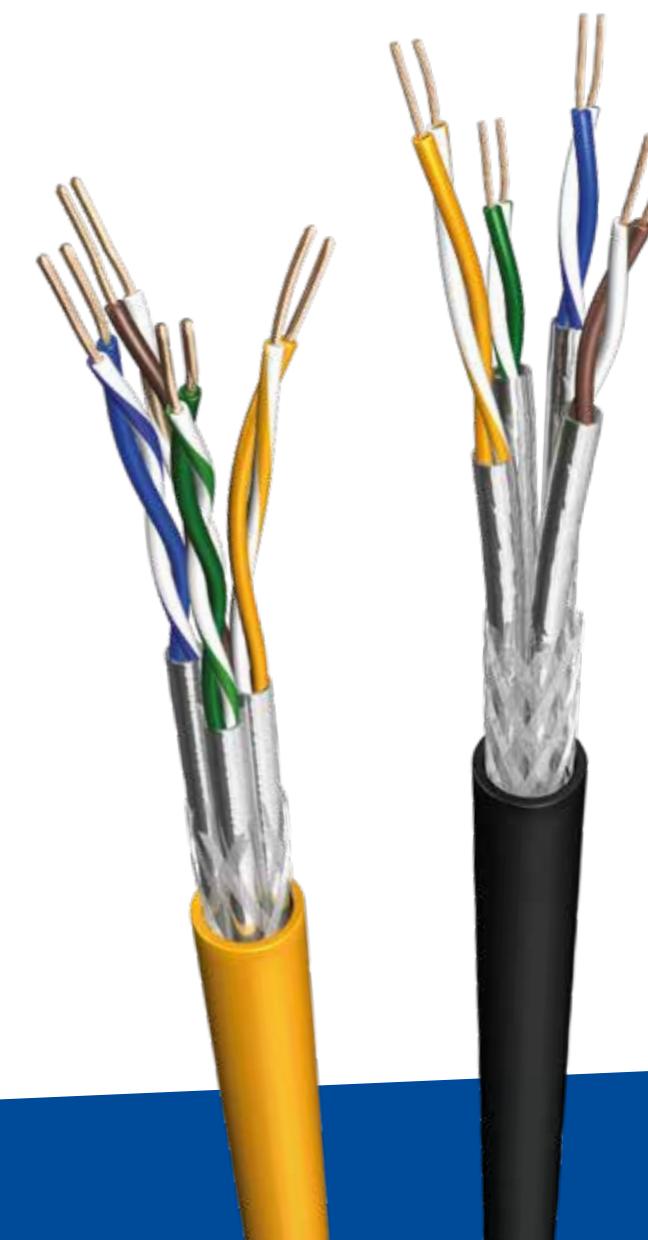

Media Install Indoor 10G MII S23



| Application |
|--|
| Primary (Campus), Secondary (Riser), Tertiary (Horizontal) IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T IEEE 802.5 16 MB; ISDN; TPDDI; ATM Power over Ethernet (PoE) / PoE+ |

| Standards |
|---|
| EN 50173-1; EN 50288-4-1; ISO/IEC 11801; IEC 61156-5; IEEE 802.3at |

| Flame resistance |
|--|
| LSHF (LSOH) IEC 60332-1; IEC 60754-2; IEC 61034; Class E _{ca} |

| Construction | |
|--------------|---|
| Conductor | bare copper wire, Ø 0.56 mm (AWG 23) |
| Insulation | Foamskin PE, Ø 1.38 mm |
| Twisting | 2 cores to the pair |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PiMF) to the core |
| Screen | copper braid, tinned |
| Sheath | LSHF, orange |
| Printing | DRAKA MII S23 MEDIA INSTALL INDOOR batch number + meter marking |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|---------------------------------------|---------------|
| Loop resistance | | 154 Ω/km |
| Resistance unbalance | | ≤ 2% |
| Insulation resistance | (500 V) | ≥ 2000 MΩ*km |
| Mutual capacitance | at 800 Hz | Nom. 43 nF/km |
| Capacitance unbalance | (pair/ground) | ≤ 1500 pF/km |
| Mean characteristic impedance | 100 MHz | 100 ± 5 Ω |
| Nominal velocity of propagation | | ca. 79 % |
| Propagation delay | | ≤ 427 ns/100m |
| Delay skew | | ≤ 12 ns/100m |
| Test voltage | (DC, 1 min) core/core and core/screen | 1000 V |
| | bei 1 MHz | ≤ 12 mΩ /m |
| Transfer impedance | bei 10 MHz | ≤ 10 mΩ /m |
| | bei 30 MHz | ≤ 30 mΩ /m |
| Coupling attenuation | | ≥ 80 dB |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Cat.7 S/FTP AWG23/1 | 60075863 | 60075863 |

Media Install Indoor 10G MII SS23



| Application |
|--|
| Primary (Campus), Secondary (Riser), Tertiary (Horizontal) IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T IEEE 802.5 16 MB; ISDN; TPDDI; ATM Power over Ethernet (PoE) / PoE+ |

| Standards |
|---|
| EN 50173-1; EN 50288-4-1; ISO/IEC 11801; IEC 61156-5; IEEE 802.3af |

| Flame resistance |
|--|
| LSHF (LSOH) IEC 60332-1; IEC 60332-3-24; IEC 60754-2; IEC 61034; EN 50399 Class D _{ca} |

| Construction | |
|--------------|---|
| Conductor | bare copper wire, Ø 0.56 mm (AWG 23/1) |
| Insulation | Foamskin PE, Ø 1.38 mm |
| Twisting | 2 cores to the pair |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PiMF) to the core |
| Screen | copper braid, tinned |
| Sheath | LSHF-FR, orange |
| Printing | DRAKA MII SS23 MEDIA INSTALL INDOOR 10Gig batch number + metermarking |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|---------------------------------------|---------------|
| Loop resistance | | 150 Ω/km |
| Resistance unbalance | | ≤ 2% |
| Insulation resistance | (500 V) | ≥ 2000 MΩ*km |
| Mutual capacitance | at 800 Hz | Nom. 43 nF/km |
| Capacitance unbalance | (pair/ground) | ≤ 1500 pF/km |
| Mean characteristic impedance | 100 MHz | 100 ± 5 Ω |
| Nominal velocity of propagation | | ca. 79 % |
| Propagation delay | | ≤ 425 ns/100m |
| Delay skew | | ≤ 9 ns/100m |
| Test voltage | (DC, 1 min) core/core and core/screen | 1000 V |
| | bei 1 MHz | ≤ 5 mΩ /m |
| Transfer impedance | bei 10 MHz | ≤ 5 mΩ /m |
| | bei 30 MHz | ≤ 10 mΩ /m |
| Coupling attenuation | | ≥ 85 dB |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Cat.7 S/FTP AWG23/1 | 60059472 | 60059472 |

Media Install Synchron MIS 23



HDTV **UHD 4K** **SYNCHRON** **E_{ca} CPR**

| Application |
|--|
| Primär (Campus), Sekundär (Riser), Tertiär (Horizontal) IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; IEEE 802.5 16 MB; ISDN; FDDI; ATM |

| Standards |
|---|
| EIA/TIA 568B; ISO/IEC 11801 2 nd ed.; IEC 61156-5; EN 50173 |

| Flame resistance |
|--|
| FRNC IEC 60332-1; IEC 60754-2; IEC 61034; Class E _{ca} |

| Construction | |
|--------------|---|
| Conductor | Bare copper wire Ø 0,56 mm (AWG 23) |
| Insulation | Foam-Skin Pe, Ø 1,35 mm |
| Twisting | 2 cores to the pairs |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PiMF) to the core |
| Screen | Copper braid tinned (ca. 65 % coverage) |
| Sheath | FRNC, orange |
| Printing | DRAKA MIS 23 MEDIA INSTALL SYNCHRON batch numer + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|-----------------|
| Bending radius | without load | ≥ 40 mm |
| | with load | ≥ 80 mm |
| Temperature range | During operation | -20°C to + 60°C |
| | During installation | 0°C to + 50°C |

| Electrical properties at 20°C ± 5°C | | | |
|---|---------|------------|---------|
| Loop resistance | Ω /km | ≤ 150 | |
| Resistance unbalance | % | ≤ 2 | |
| Mutual capacitance at 800 Hz | nF/km | nom. 43 | |
| Capacitance unbalance (pair/ground) | pF/km | ≤ 1500 | |
| Characteristic impedance (1-100) MHz | Ω | (100 ± 15) | |
| (100 - 250) MHz | | (100 ± 18) | |
| (250 - 600) MHz | | (100 ± 25) | |
| Nominal velocity of propagation | % | Ca. 79 | |
| Propagation delay | ns/100m | ≤ 427 | |
| Delay skew | ns/100m | ≤ ± 2 | |
| Test voltage (DC, 1 min) Core/core and core/screen | V | 1000 | |
| Transfer impedance (mΩ /m) | 1 MHz | 30 MHz | 100 MHz |
| | 5 | 5 | 10 |
| | | | 20 |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Cat.7 S/FTP AWG23/1 | | 1018490 |

Media Flex Outdoor 10G MFO 26



PoE+ **HDTV** **UHD 4K**

| Application |
|--|
| Data connecting cable for studio application Suitable for Video Ethernet; IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; IEEE 802.5 16 MB; ISDN; FDDI; ATM, 10GBase-T Suitable for outside use, not suitable for laying directly in the ground Not for fixed installation for construction works |

| Standards |
|---|
| EIA/TIA 568B; ISO/IEC 11801 2 nd ed.; IEC 61156-6 EN 50173; EN 50288-4-2 |

| Construction | |
|-----------------|--|
| Inner conductor | Stranded copper wire, bare, 0,14 mm ² |
| Insulation | Foam-Skin PE, Ø 1,05mm |
| Twisting | 2 cores to the pair |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PimF) to the core |
| Screen | Copper braid tinned Ø 5,1 mm |
| Wrapping | Polyester web |
| Sheath | DMC FLEX PUR, black, RAL 9005 |
| Printing | DRAKA MFO 26 MEDIA FLEX OUTDOOR 10Gig batch number + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|-----------------|
| Bending radius | without load | 8 x D |
| | with load | 4 x D |
| Temperature range | During operation | -40°C to + 70°C |
| | During installation | 0°C to + 50°C |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|-----------------|--|
| Characteristic impedance | @ 100 MHz | ≤ 150 |
| Loop resistance | max. | ≤ 2 |
| Resistance unbalance | max. | nom. 43 |
| Propagation delay | | ≤ 1500 |
| Delay skew | max. | (100 ± 15) (100 ± 18) (100 ± 25) |
| Transfer Impedance | 1 MHz 10 MHz | 25 mΩ /m 25 mΩ /m |
| Nominal velocity of propagation | | 0.75 c |
| Mutual capacitance | nominal | 43 nF/km |
| Capacitance unbalance | max. | 700 pF/km |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| CAT 7 S/FTP AWG26 | | 60058148 |

Media Flex Outdoor 10G MFO 23

| Application |
|--|
| Data connecting cable for studio application |
| Suitable for Video Ethernet; IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; IEEE 802.5 16 MB; ISDN; FDDI; ATM, 10GBase-T |
| Suitable for outside use, not suitable for laying directly in the ground |
| Not for fixed installation for construction works |

| Standards |
|---|
| EIA/TIA 568B; ISO/IEC 11801 2 nd ed.; IEC 61156-6 EN 50173; EN 50288-4-2 |

| Construction | |
|-----------------|--|
| Inner conductor | Stranded copper wire, bare, (AWG23/7), Ø 0,64mm |
| Insulation | Foam-Skin PE, Ø 1.6mm |
| Twisting | 2 cores to the pair |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PiMF) to the core |
| Screen | Copper braid tinned |
| Wrapping | Polyester web |
| Sheath | DMC FLEX PUR, black, RAL 9005, Ø 9.3 mm |
| Printing | DRAKA MFO 23 MEDIA FLEX OUTDOOR 10Gig batch number + meter marking |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|-----------------|
| Bending radius | without load | 8 x D |
| | with load | 4 x D |
| Temperature range | During operation | -40°C to + 80°C |
| | During installation | -5°C to + 50°C |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|--------------------------------------|--|
| Characteristic impedance | @ 100 MHz | 100 ± 5 Ω |
| Loop resistance | max. | 138Ω/km |
| Resistance unbalance | max. | 2% |
| Propagation delay | | 450 ns/100m |
| Delay skew | max. | 10 ns/100m |
| Transfer Impedance | 1 MHz 10 MHz 30 MHz 100 MHz | ≤ 5 mΩ /m ≤ 5 mΩ /m ≤ 10 mΩ /m ≤ 20 mΩ /m |
| Nominal velocity of propagation | | 0.75 c |
| Mutual capacitance | nominal | 45 nF/km |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| CAT 7 S/FTP AWG23 | | 60058147 |

Media Flex Indoor 10G MFI 26

| Application |
|--|
| Work area and patch cord cable |
| IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T |
| IEEE 802.5 16 MB; ISDN; TPDDI; ATM |

| Standards |
|--|
| EN 50173-1; EN 50288-4-2 |
| ISO/IEC 11801; IEC 61156-6 |
| Flame resistance |
| LSHF (FRNC) IEC 60332-1; IEC 60754-2; IEC 61034; Class E _{ca} |

| Construction | |
|--------------|---|
| Conductor | Stranded bare copper wire Ø 0.48 mm (AWG 26/7) |
| Insulation | Foam Skin Polypropylene, Ø 1.00 mm |
| Twisting | 2 cores to the pair |
| Pair screen | Al-laminated plastic foil |
| Cable lay up | 4 pairs (PiMF) to the core |
| Screen | Copper braid, tinned Ø 5.1mm |
| Sheath | LSHF, grey Ø 6.4mm |
| Printing | DRAKA MFI 26 MEDIA FLEX INDOOR 10Gig S/FTP Patch 4P IEC 61156-6 LSHF <factory code/batch no./ date-time> meter > m |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|-----------------|
| Bending radius | without load | 8 x D |
| | with load | 4 x D |
| Temperature range | During operation | -20°C to + 60°C |
| | During installation | 0°C to + 50°C |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|---------------------------------------|--------------------|
| Loop resistance | | ≤ 250 Ω/km |
| Resistance unbalance | | ≤ 3% |
| Insulation resistance | (500 V) | ≥ 2000 MΩ*km |
| Mutual capacitance | at 800 Hz | Nom. 43 nF/km |
| Capacitance unbalance | Max. | 700 pF/km |
| Mean characteristic impedance | 100 MHz | 100 ± 5 Ω |
| Nominal velocity of propagation | | 0.75 c |
| Propagation delay | | ≤ 460 ns/100m |
| Delay skew | | ≤ 10 ns/100m |
| Test voltage | (DC, 1 min) core/core and core/screen | 1000 V |
| Transfer impedance | at 1 MHz at 10 MHz | 25 mΩ/m 25 mΩ/m |

| Product Code Table | | |
|---------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| Cat 7 S/FTP AWG26 | | |

Digital Control Cable 2 x 0.22mm² B2ca**B2_{ca}
CPR**

| Application | | Standards | |
|--|--|--|--|
| Control cables are used in professional broadcasting systems for digital signals, like AES/EBU audio | | AES/EBU; IEC 60332-3-24 Cpr class: B2 _{ca} | |
| Construction | | | |
| Conductor | stranded copper wires, tinned, AWG24/7, (cross section 0.22 mm ²). | Ø 0.6 mm | |
| Insulation | Foam Skin PE | Ø 1.2 mm | |
| Twisting | 2 cores to the pair | Ø 2.4 mm | |
| Pair colour | white, blue | | |
| Pair screen | Al-PET-foil, Aluminum inside + stranded copper drain wires, tinned | | |
| Overall screen | Copper braid, tinned | | |
| Sheath | FRNC-C, black, RAL 9005 | Ø 6.0 mm | |
| Printing | DRAKA Digital control cable FRNC-C AES/EBU - 110 Ω B2ca s1a d1 a1 <CE> batch number + meter marking | | |
| Mechanical properties at 20°C | | | |
| Bending radius | without load | ≥ 4 x D (D= outer diameter) | |
| | with load | ≥ 8 x D (D= outer diameter) | |
| Temperature range | During operation | -20°C to + 60°C | |
| | During installation | -5°C to + 50°C | |
| Electrical properties at 20°C± 5°C | | | |
| Loop resistance | | ≤ 175 Ω/km | |
| Insulation resistance | 500 V | ≥ 2000 MΩ*km | |
| Mutual capacitance | 800 Hz | nom. 45 nF/km | |
| Velocity ratio | | ca .78% | |
| Test voltage | (DC. 1 min) core/core and core/screen | 1000 V | |
| Characteristic impedance | 6 MHz | 110 Ω ± 10 % | |
| Product Code Table | | | |
| Product Description | PG Reference Code | PG Part Number | |
| Control pair 0.22 ² FRNC-C B2 _{ca} | 60084106 | | |

DMX + 3x2.5mm²

| Construction | |
|---|---|
| Element 1: DMX Data pair | |
| Conductor | stranded bare copper wire, diameter 7 x 0.25 mm (cross section 0.35 mm ²) |
| Insulation | Ø 0.75 mm |
| Twisting | Foam-Skin PE, wall thickness 0.71 mm |
| Core identification | Ø 1.8 ± 0.1 mm |
| Overall screen | 2 cores + 2 x PP-fillers twisted to the pair |
| Foil | 1x white, 1x green |
| Sheath | Ø 3.6 mm |
| Element 2: 3 x 2.5mm² | |
| Conductor | 1x PET-Al-foil + tinned stranded drain wires 19 x 0,15 mm + tinned copper braid |
| Insulation | optical coverage 3 65% |
| Twisting | 1x PET-foil under sheath |
| Core identification | Ø 5.1 mm |
| Sheath | PVC, black, RAL 9005 |
| Mechanical properties at 20°C | |
| Bending radius | stranded bare copper wire, (cross section 2.5 mm ²) |
| Temperature range | Ø 2.0 mm |
| | During operation |
| | During installation |
| Stranding | Ø 3.4 mm |
| Wrapping | Ø 7.3 mm |
| Sheath | 1x brown, blue, 1x green/yellow |
| Printing | PVC, black, RAL 9005 |
| Electrical properties DMX Data pair at 20°C± 5°C | |
| Conductor resistance (at 20 ± 5 °C) | ≤ 54.5 Ω/km |
| Characteristic impedance at 1 MHz | 120 Ω ± 10% |
| Insulation resistance (at 20 ± 5 °C and 500 V) | ≥ 10 GΩxkm |
| Test voltage (AC, 1 min) Core/core and core/screen | 1.2 kV |
| Electrical properties 3x2.5mm² at 20°C± 5°C | |
| Conductor resistance (at 20 ± 5 °C) | ≤ 7.9 Ω/km |
| Insulation resistance (at 20 ± 5 °C and 500 V) | ≥ 10 GΩxkm |
| Test voltage (AC, 1 min) Core/core and core/screen | 1.2 kV |
| Product Code Table | |
| Product Description | PG Reference Code |
| DMX + 2x2.5mm ² | 90150964 |

DMX 234 AES/EBU (2x 0.34mm²) FRNC

| Application | |
|--|--|
| Audio cables are used in professional broadcasting systems for the transmission of analogue and digital audio signals. | |

| Standards | |
|--|--|
| DMX cable for light control CPR class: D _{ca} ; IEC60332-1 | |

| Construction | |
|----------------|---|
| Conductor | Stranded copper wires, bare, diameter 0.75 mm (AWG22, 0.34mm ² , 7 x 0.25mm) |
| Insulation | Foam-PE, diameter 1.8 mm |
| Identification | a - core: red; b - core: black |
| Stranding | two cores twisted to the bundle + 7x0.25 drain wire, bare, diameter 3.6 m |
| Screen | Al-PET foil |
| Sheath | LSOH, diameter 6.0 mm ± 0.1 mm, grey |
| Printing | DRAKA – DMX 234 LSOH AES/EBU batch number and metermarking |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|------------------------------|
| Bending radius | without load | ≥ 4 x D (D = outer diameter) |
| | with load | ≥ 8 x D (D = outer diameter) |
| Temperature range | During operation | -30°C to +70°C |
| | During installation | -5°C to +50°C |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|---------------------------------------|---------------|
| Loop resistance | | ≤ 55 Ω/km |
| Conductor resistance | | ≤ 110 Ω/km |
| Insulation resistance | 500 V | ≥ 2000 MΩ*km |
| Mutual capacitance | 800 Hz | nom. 60 nF/km |
| Velocity ratio | | ca. 67% |
| Capacitance conductor/shield | | 130pF |
| Test voltage | (DC. 1 min) core/core and core/screen | 1000 V |
| Characteristic Impedanc | | 110Ω |

| Product Code Table | | |
|----------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DMX 234 1x2x0.34 mm ² | | |

DMX 434 FRNC or PVC


| Application | |
|-----------------------------|--|
| DMX cable for light control | |

| Construction | |
|----------------|---|
| Conductor | Stranded copper wires, bare, diameter 0.75 mm (AWG22, 0.34mm ² , 7 x 0.25mm) |
| Insulation | Foam-PE, diameter 1.8 mm |
| Identification | a - core: red; b - core: white; c - core: blue; d - core: black |
| Stranding | four cores twisted to the bundle, diameter 3.6 mm |
| Screen | Al-PET foil under a tinned copper braid+ 7x0.25 drain wire, tinned |
| Sheath | PVC, diameter 6.5 mm ± 0.2 mm, black, RAL 9005 |
| Printing | DRAKA – DMX 434 AES/EBU batch number and metermarking |

| Mechanical properties at 20°C | | |
|-------------------------------|---------------------|------------------------------|
| Bending radius | without load | ≥ 4 x D (D = outer diameter) |
| | with load | ≥ 8 x D (D = outer diameter) |
| Temperature range | During operation | -20°C to +70°C |
| | During installation | -5°C to +50°C |

| Electrical properties at 20°C ± 5°C | | |
|-------------------------------------|---------------------------------------|---------------|
| Loop resistance | | ≤ 55 Ω/km |
| Conductor resistance | | ≤ 110 Ω/km |
| Insulation resistance | 500 V | ≥ 2000 MΩ*km |
| Mutual capacitance | 800 Hz | nom. 60 nF/km |
| Velocity ratio | | ca. 67% |
| Capacitance conductor/shield | | 130pF |
| Test voltage | (DC. 1 min) core/core and core/screen | 1000 V |
| Characteristic Impedanc | | 110Ω |

| Product Code Table | | |
|----------------------------------|-------------------|----------------|
| Product Description | PG Reference Code | PG Part Number |
| DMX 434 2x2x0.34 mm ² | | |

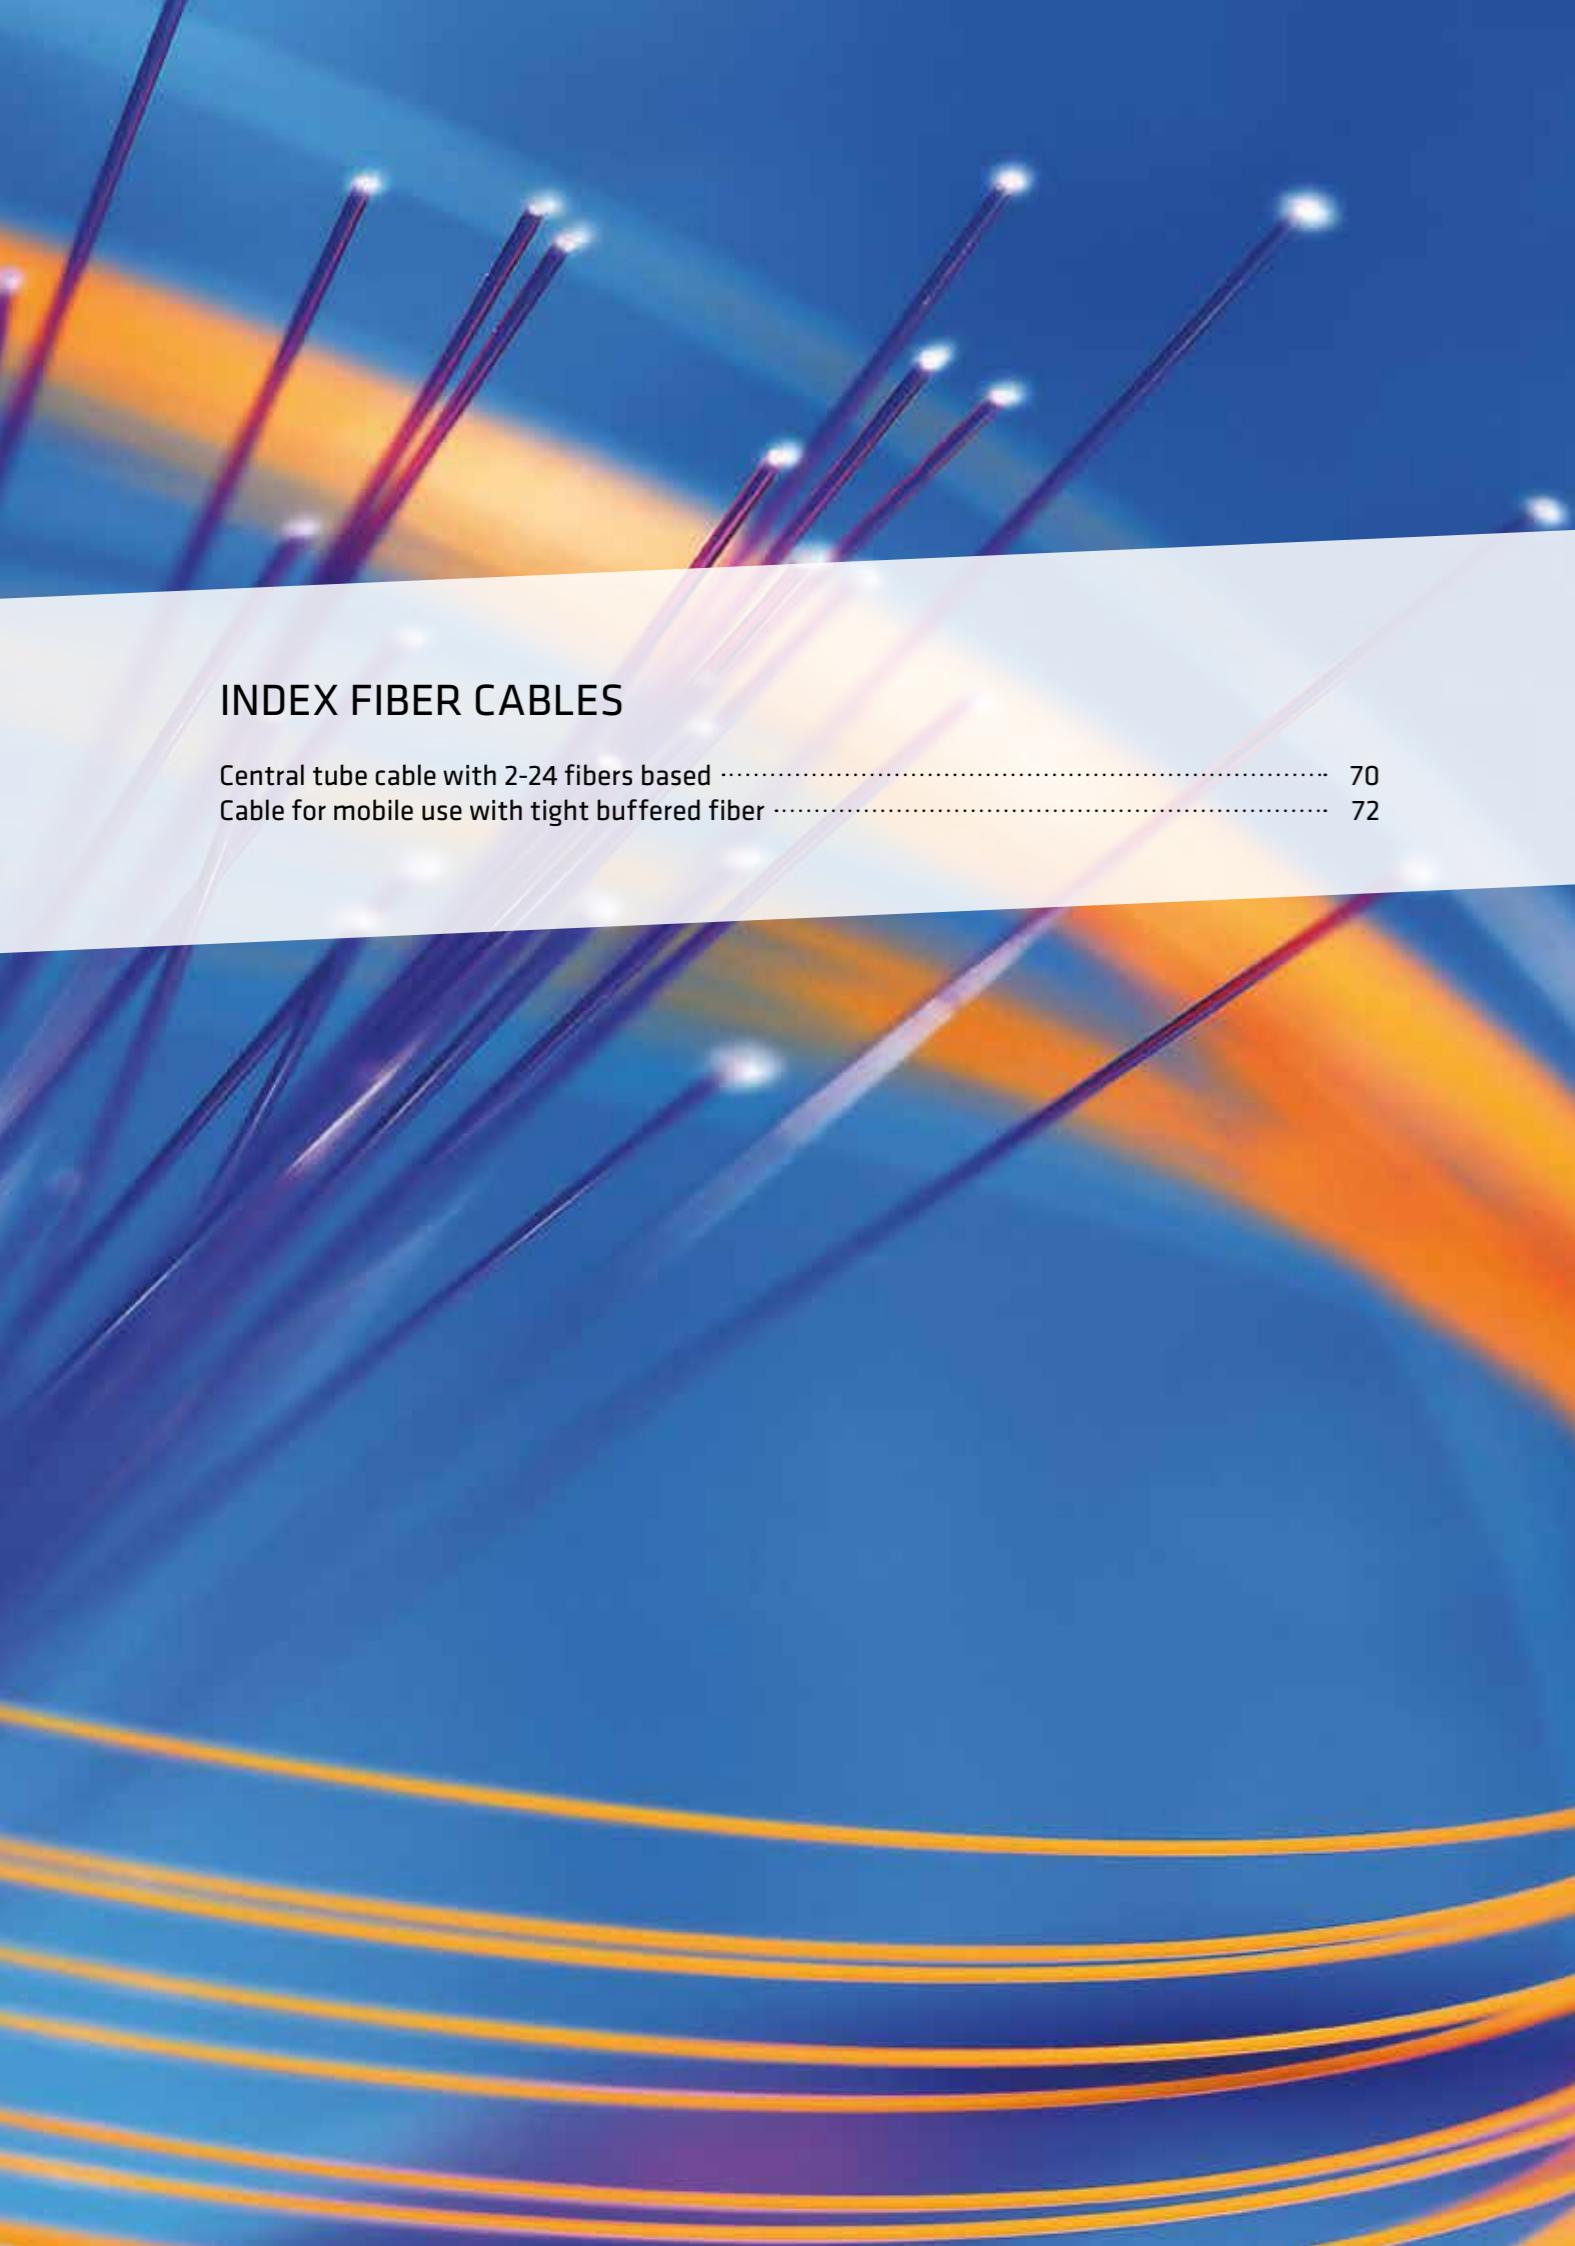

INDEX FIBER CABLES

| | |
|--|----|
| Central tube cable with 2-24 fibers based | 70 |
| Cable for mobile use with tight buffered fiber | 72 |

6. FIBER CABLES

• Installation cables:

The cable is water-blocked and well suited for installation in ducts and on trays indoor and limited outdoor use in ducts

Standard Fiber Installation cables:

High bit Media Transport over IP Networks SMPTE ST 2110
The broadcast signal is transmitted serially, line by line, frame by frame. Each line and each picture has sync pulses (V and H). In addition, the audio channels and auxiliary data are transmitted. The actual video signal is uncompressed in 4: 2.2 / 10bit. The networks have been designed as coaxial cable in 75 ohms for years.

The **SMPTE ST 2110** is a standard of the Society of Motion Picture and Television Engineers (SMPTE). This specifies the transmission of uncompressed digital broadcast signals (video stream) over an IP network in real time. Each record (video, audio, data) is synchronized with each other without affecting the records. They can be routed and edited separately, as well as metadata such as timecode, subtitles and teletext assigned to the records.

The application: The pioneers of media transport of native HD signal over long distances were the hosts of big events, like for big football tournaments, Olympic and wintersport events.

The **IP MediaLine Fiber Cable Series** based on **SMPTE 2110** is designed for installation in the studio, stadiums and event of the broadcast sector.



IP MediaLine Fiber on SMPTE 2110
Central tube cable with 2-24 fibers based



C_{ca}
CPR
D_{ca}
CPR
E_{ca}
CPR

| Application and installation | | | | | | | | |
|---|---|-----------|----|-----------------------------|--|--|--|--|
| This cable can be used to send digital video over an IP network, fiber to business and fiber to the building drop connections as well as fiber to the home drop and access connections. SMPTE 2110 is a standard from the Society of Motion Picture and Television Engineers (SMPTE) that describes how to send digital video over an IP network. | | | | | | | | |
| Non-metallic unitube cable is with gel-filled tubes and water-blocked design. With its FireRes® sheathing this cable is ideal for indoor installations. It is CPR Class Cca cable with very high flame retardant performance. It has glass yarn dielectric armouring for rodent resistance. The cable is water-blocked and well suited for installation in ducts and on trays indoor and limited outdoor use in ducts. It is equally suited for installation in ducts and on trays. It has a degree of rodent protection. | | | | | | | | |
| Standards | | | | | | | | |
| ISO 11801-1, EN 50173-1:2011, IEC 60794-1 | | | | | | | | |
| Flame resistance | | | | | | | | |
| LSHF-FR (FRNC) | IEC 60332-1-2(single vertical wire test), IEC 60332-3-24, IEC 60754-1(no halogens), IEC 60754-2(No acid), IEC 61034-2 (no dense); | | | | | | | |
| | EN 50399 | | | | | | | |
| CPR class C _{ca} s1-d1-a1, class D _{ca} s1 d1 a1, class E _{ca} s1 d1 a1 | | | | | | | | |
| Construction | | | | | | | | |
| Loose tube | Ø2.8 mm gel-filled loose tube with 2 - 24 fibers | | | | | | | |
| | 1 | Red | 13 | Red w/mark every 70mm | | | | |
| | 2 | Green | 14 | Green w/mark every 70mm | | | | |
| | 3 | Blue | 15 | Blue w/mark every 70mm | | | | |
| | 4 | Yellow | 16 | Yellow w/mark every 70mm | | | | |
| | 5 | White | 17 | White w/mark every 70mm | | | | |
| | 6 | Grey | 18 | Grey w/mark every 70mm | | | | |
| | 7 | Brown | 19 | Brown w/mark every 70mm | | | | |
| | 8 | Violet | 20 | Violet w/mark every 70mm | | | | |
| | 9 | Turquoise | 21 | Turquoise w/mark every 70mm | | | | |
| | 10 | Black | 22 | White w/mark every 35mm | | | | |
| | 11 | Orange | 23 | Orange w/mark every 70mm | | | | |
| | 12 | Pink | 24 | Pink w/mark every 70mm | | | | |
| Fiber colour code | | | | | | | | |
| Strength member | Water-blocking Glass yarns | | | | | | | |
| | Sheath | | | | | | | |
| | 2.0 mm (colour see product description) FireRes® sheath, UV stabilised, IEC 50290-2-27 | | | | | | | |
| | Sheath marking | | | | | | | |
| | Draka IP MediaLine Fiber Cca s1 d1 a1 3.0 kN SMPTE2022 <Fibre count> <Mode field diameter> /125 CT <Factory code> <Batch Number> <Meter mark> <Transmission Class> <CE> | | | | | | | |
| | For example 8E9/125 | | | | | | | |
| | Draka IP MediaLine Fiber Cca s1 d1 a1 3.0 kN 8E9/125 CT SMPTE 2022 <factory code> <batch number> <meter marking> <Transmission Class> <CE> | | | | | | | |

| Physical properties | | |
|--|--------------------------|--|
| Attribute | IEC 60794-1-21/22 Method | Limits |
| Nominal outer diameter | - | 2 - 24 fibers: 9.4 mm |
| Nominal weight | - | 2 - 24 fibers: 110 kg/km |
| Maximum installation tensile strength | E1 | 3000 N (fiber strain ≤ 0.6%) |
| Permanent tensile strength | E1 | 1000 N (fiber strain ≤ 0.2%) |
| Compressive strength (crush) | E3 | 2000 N / 100 mm |
| Impact | E4 | 20 J |
| Torsion | E7 | 5 cycles ± 1 turn |
| Kink | E10 | The cables do not form a kink when a loop is drawn together to a diameter of 100 mm |
| Min. bending radius, unloaded (permanent) | E11 | R = 94 mm |
| Min. bending radius, loaded (installation) | - | R = 188 mm |
| Temperature range | F1 | Storage: -30°C to +60°C Installation: -30°C to +40°C Operation: -30°C to +60°C |
| Water penetration | F5B | No water on free end |

| Product Codes | | | | | |
|----------------------|-------------|-------------------------------|-------------|-------------------------------|------------------|
| Product Code | DoP Number* | Product Description | Fibre Count | Fibre Type | Fibre Data Sheet |
| 60090487 | | 4E/9125 CT LSHF 3kN blue | 4 | BendBright XS G.657 A2 and B2 | C24 |
| 60090490 | | 8E/9125 CT LSHF 3kN black | 8 | BendBright XS G.657 A2 and B2 | C24 |
| 60090496 | | 12E/9125 CT LSHF 3kN grey | 12 | BendBright XS G.657 A2 and B2 | C24 |
| 60090507 | | 24E/9125 CT LSHF 3kN violet | 24 | BendBright XS G.657 A2 and B2 | C24 |
| | | | | | |
| | | 4G62.5/125 CT LSHF 3kN yellow | 4 | MaxCap-OM1 | C02 |
| | | 8G62.5/125 CT LSHF 3kN orange | 8 | MaxCap-OM1 | C02 |
| | | 12G62.5/125 CT LSHF 3kN red | 12 | MaxCap-OM1 | C02 |
| | | | | | |
| | | 4G50/125 CT LSHF 3kN yellow | 4 | MaxCap-BB-OM2 | C34 |

IP MediaLine Fiber on SMPTE 2110
Cable for mobile use with tight buffered fiber



| Construction | |
|---------------------------|---|
| Fiber Type | 9/125 µm Single mode, BendBright XS (BBXS) Tight buffer, PBT |
| Fiber core diameter | 9 µm |
| Cladding diameter | 125 ± 0.4 µm |
| Primary Coating diameter | 242 ± 5 µm |
| Secondary buffer diameter | 900 µm |
| Identification | Colored fibers: 1x red, 1x blue, 1x yellow, 1x green |
| Cable lay up | 4 elements (0+4) 4 fibers twisted to a bundle 12 elements (3+9) 12fibers twisted to a bundle |
| Strength member | Aramid yarn |
| Wrapping | Polyester Web |
| Sheath | PUR HFFR, black matt, RAL 9005 4 elements diameter 6.0mm 12 elements diameter 6.5mm |
| Printing MFC E4-LV5 | DRAKA Mobile Fiber cable MFC E4-LV5 OUTDOOR batch number + meter |
| Printing MFC E12-LV5 | DRAKA Mobile Fiber cable MFC E12-LV5 OUTDOOR batch number + mete |

| Product Codes | | | | | | |
|---------------|----------------|-------------|----------------|--------------|-----------|---------------|
| Product Code | Type | Brand name | Outer diameter | Weight Kg/km | Fibre typ | Tensile force |
| 60082205 | 4 x 9/125 PUR | MFC E4-LV5 | 6.0 | 29 | BBXS | 400 |
| 60082204 | 8 x 9/125 PUR | MFC E8-LV5 | 6.5 | 35 | BBXS | 700 |
| 60082203 | 12 x 9/125 PUR | MFC E12-LV5 | 6.5 | 42 | BBXS | 1000 |



**NEXT
GENERATION**

High Bitrate
- We don't care



FUTURE-ORIENTED CABLING SOLUTIONS

We have offices and production facilities all over the world.
To get in touch with us and find out how we can help you build your network.

AUSTRIA*

Lemböckgasse 47A
A-1230 Vienna
Phone: +43 12 94 00 95 16
romana.krumboeck
@prysmiangroup.com
* including: Hungary, Czech Republic, Slovakia, Slovenia, Albania, Macedonia, Romania and Bulgaria

DENMARK

Prysmian Group Denmark A/S
Roskildevæj 22
DK-2620 Albertslund
Phone: +45 60 39 27 39
Phone: +45 60 39 27 29
dk-ti-sales@prysmiangroup.com

ESTONIA

Prysmian Group Estonia AS
Paldiski mnt. 31
76606 Keila
Phone: +371 927 27 31 (Latvia)
Phone: +370 61 87 43 84 (Lithuania)
info.keila@prysmiangroup.com

FINLAND

Prysmian Group Finland Oy
Kaapelitie 68
FI-02490 Pikkala

Johdintie 5
FI-90620 Oulu
Phone: +35 010 56 61
fi-info@prysmiangroup.com

FRANCE

Draka Comteq France SAS
Bât. A6 - Parc de la Haute Maison
2 Allée Hendrik Lorentz
Champs sur Marne
77447 Marne la Vallée Cedex 2
Phone: +33 169 67 32 07
multimedia@prysmiangroup.com

GERMANY*

Piccoloministr. 2
D-51063 Köln
Phone: +49 221 67 70
multimedia@prysmiangroup.com
* including: Switzerland and Poland

ITALY

Prysmian Cables and Systems
Via Chiese 6
20126 Milano
Phone: +39 02 64 49 32 01
multimedia@prysmiangroup.com

NETHERLANDS

Draka Kabel B.V.
Schieweg 9
2627 AN Delft
Phone: +31 206 37 99 11
multimedia@prysmiangroup.com

NORWAY

Prysmian Group Norge AS
Kjerraten 16
3013 Drammen
Phone: +47 32 24 90 00
no-kundesenter
@prysmiangroup.com

SINGAPORE

Singapore Cables Manufacturers
Pte Ltd, SCM
Draka Comteq Singapore Pte Ltd, DCS
Prysmian Cables Systems Pte Ltd, PCS
Draka Vietnam (SCM Rep Office)
No 20 Jurong Port Road
Jurong Town
Singapore 619094
Phone: +65 62 65 07 07
multimedia@prysmiangroup.com

SPAIN*

Can Vinyals núm. 2
E-08130 Sta. Perpetua de Mogoda
Barcelona
Phone: +34 935 74 83 83
multimedia@prysmiangroup.com
* including: Portugal

SWEDEN

Prysmian Group Sweden AB
Vallgatan 5
57141 Nässjö
Phone: +46 380 55 42 09
Phone: +46 380 55 42 08
info.se@prysmiangroup.com
order.se@prysmiangroup.com
offert.se@prysmiangroup.com

TURKEY*

Haktan Is Merkezi No:39 Kat 2
Setustu Kabatas
34427 Istanbul
Phone: +90 21 66 82 80 01
tpks@prysmiangroup.com
* including: All other countries in Africa and Middle East

UNITED KINGDOM

Chickenhall Lane
Eastleigh
Hampshire, SO50 6YU
England
Phone: +44 23 80 29 55 55
multimedia@prysmiangroup.com

